df Electric

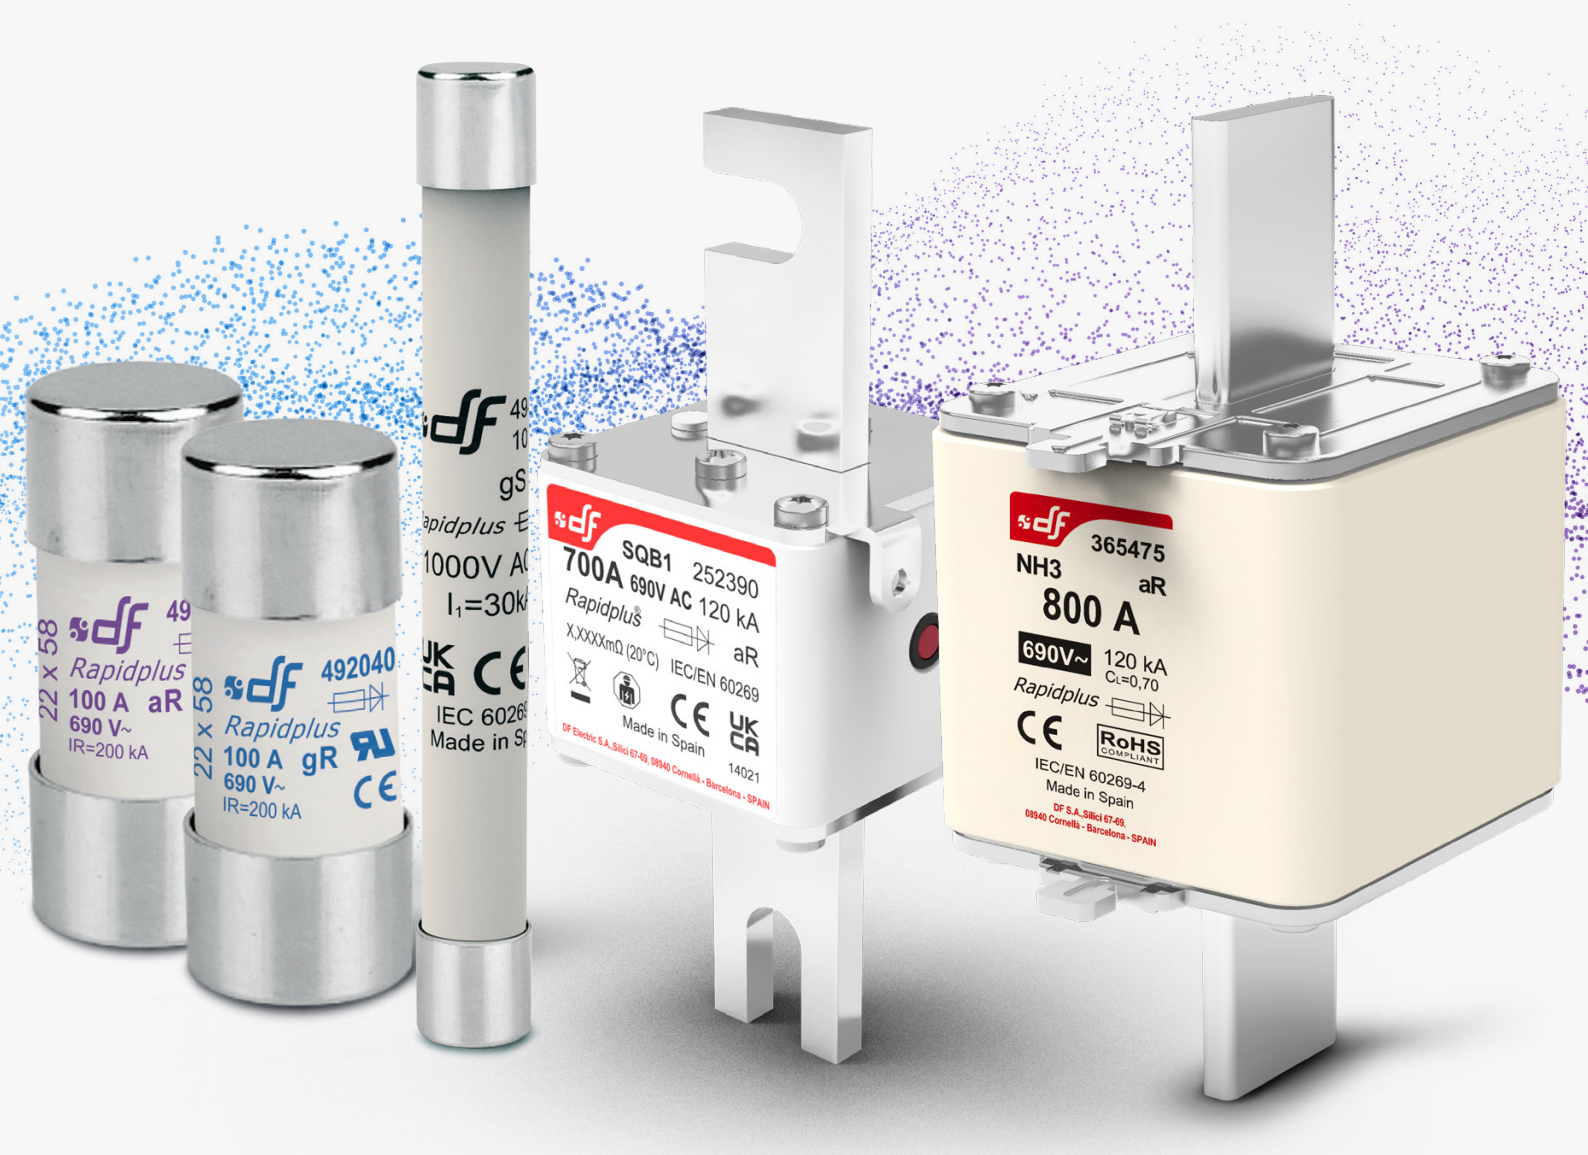

RAPIDPLUS

HIGH SPEED FUSE LINKS FOR SEMICONDUCTORS

RAPIDPLUS

HIGH SPEED FUSE LINKS FOR SEMICONDUCTORS

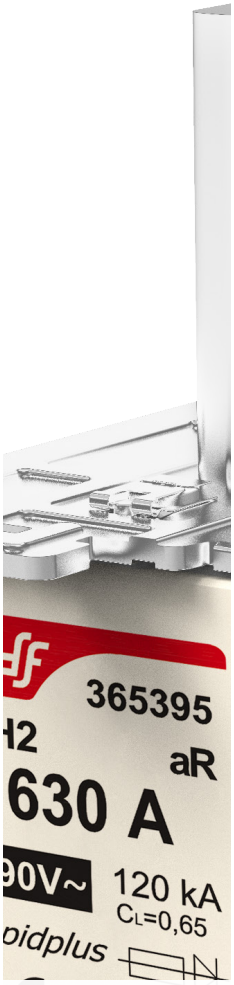

RAPIDPLUS

HIGH SPEED FUSE LINKS FOR SEMICONDUCTORS

CYL

gS CYLINDRICAL fuse links

RAPIDPLUS CYL 10x85 gS 1.000V fuse links are capable to clearing all types of overcurrents, overloads as well as short-circuits, thus the fuse links protect semiconductors as well as cables and all switchgear of installation.
For this reason there are high speed fuse links for this specific purpose, with very fast melting characteristics, low let-through energy values (I^2t) and adequate selective coordination with protection devices upstream.

10x85

U	1000V AC/DC
BREAKING CAPACITY	30kA AC 10kA DC

In (A)	REFERENCE	PACKING Uni /BOX
1	**494001**	10/50/1000
2	**494002**	10/50/1000
3	**494003**	10/50/1000
4	**494004**	10/50/1000
5	**494005**	10/50/1000
6	**494006**	10/50/1000
8	**494008**	10/50/1000
10	**494010**	10/50/1000
12	**494012**	10/50/1000
16	**494016**	10/50/1000
20	**494020**	10/50/1000



STANDARDS

IEC/EN 60269-1
IEC/EN 60269-4

DIMENSIONS
PAGE 15

t-I | CUT-OFF CHARACTERISTICS
PAGE 16

RAPIDPLUS

HIGH SPEED FUSE LINKS FOR SEMICONDUCTORS

CYL gR CYLINDRICAL fuse links

RAPIDPLUS gR fuse links are capable to clearing all types of overcurrents, overloads as well as short-circuits, thus the fuse links protect semiconductors as well as cables and all switchgear of installation. Typical application comprise protection of semiconductors (diodes, thyristors, triacs, etc) used in power rectifiers, UPS, converters, motor drives (AC and DC), soft starters, solid state relays, photovoltaic inverters, welding inverters and any application where it is necessary to protect semiconductor devices. UL certification according to UL248 standard. UL file Nr. E477155.

10x38

U	690V AC UL/IEC 440V DC IEC
BREAKING CAPACITY	200kA 30kA @440V DC
STANDARDS	

In (A)	REFERENCE WITHOUT STRIKER	REFERENCE WITH STRIKER	PACKING Uni /BOX
1	492000		10/100
2	492001		10/100
3	492002		10/100
4	492003		10/100
6	492004		10/100
8	492005		10/100
10	492006		10/100
12	492007		10/100
16	492008		10/100
20	492009		10/100
25	492010		10/100
32	492011		10/100

14x51

U	690V AC UL/IEC 440V DC IEC
BREAKING CAPACITY	200kA 30kA @440V DC
STANDARDS	

In (A)	REFERENCE WITHOUT STRIKER	REFERENCE WITH STRIKER	PACKING Uni /BOX
4	492014		10/50
6	492015		10/50
8	492016	492116	10/50
10	492017	492117	10/50
12	492018	492118	10/50
16	492019	492119	10/50
20	492020	492120	10/50
25	492021	492121	10/50
32	492022	492122	10/50
40	492023	492123	10/50
50	492024	492124	10/50

22x58

U	690V AC UL/IEC 440V DC IEC
BREAKING CAPACITY	200kA 30kA @440V DC
STANDARDS	

In (A)	REFERENCE WITHOUT STRIKER	REFERENCE WITH STRIKER	PACKING Uni /BOX
20	492033	492133	10/50
25	492034	492134	10/50
32	492035	492135	10/50
40	492036	492136	10/50
50	492037	492137	10/50
63	492038	492138	10/50
80	492039	492139	10/50
100	492040	492140	10/50

STANDARDS

IEC/EN 60269-1
IEC/EN 60269-6
UL 248-1
UL 248-13

DIMENSIONS

PAGE 17 (10x38)
PAGE 19 (14x51)
PAGE 21 (22x58)

t-I | CUT-OFF CHARACTERISTICS

PAGE 18 (10x38)
PAGE 20 (14x51)
PAGE 22 (22x58)

USE IN PMX MODULAR FUSE HOLDERS

PAGE 59

df Electric

RAPIDPLUS

HIGH SPEED FUSE LINKS FOR SEMICONDUCTORS

CYL aR CYLINDRICAL fuse links

RAPIDPLUS aR fuse links are intended to clearing short-circuits and have been designed and manufactured to have very low I^2t values as well as reduced arc voltages that guarantee an optimum protection of semiconductors. They have a very good cycling ability. Made of ceramic tubes with high withstand to internal pressure and thermal shock, and silver plated copper contacts. Typical application comprise protection of semiconductors (diodes, thyristors, triacs, etc) used in power rectifiers, UPS, converters, motor drives (AC and DC), soft starters, solid state relays, photovoltaic inverters, welding inverters and any application where it i necessary to protect semiconductor devices. UL certification according to UL248 standard. UL file Nr. E477155.

10x38

U: 690V AC UL/IEC, 700V DC IEC

BREAKING CAPACITY: 200kA, 30kA @700V DC

STANDARDS: UL

In (A)	REFERENCE WITHOUT STRIKER	REFERENCE WITH STRIKER	PACKING Uni /BOX
1	491105		10/100
2	491107		10/100
3	491110		10/100
4	491113		10/100
6	491115		10/100
8	491120		10/100
10	491125		10/100
12	491130		10/100
16	491135		10/100
20	491140		10/100
25	491145		10/100
32	491155		10/100

14x51

U: 690V AC UL/IEC, 700V DC IEC

BREAKING CAPACITY: 200kA, 30kA @700V DC

STANDARDS: UL

In (A)	REFERENCE WITHOUT STRIKER	REFERENCE WITH STRIKER	PACKING Uni /BOX
4	491215		10/50
6	491225		10/50
8	491230	491730	10/50
10	491235	491735	10/50
12	491237	491737	10/50
16	491241	491741	10/50
20	491245	491745	10/50
25	491250	491750	10/50
32	491260	491760	10/50
40	491265	491765	10/50
50	491270	491770	10/50

22x58

U: 690V AC UL/IEC, 700V DC IEC

BREAKING CAPACITY: 200kA, 30kA @700V DC

STANDARDS: UL

In (A)	REFERENCE WITHOUT STRIKER	REFERENCE WITH STRIKER	PACKING Uni /BOX
20	491300	491800	10/50
25	491305	491805	10/50
32	491310	491810	10/50
40	491315	491815	10/50
50	491320	491820	10/50
63	491325	491825	10/50
80	491330	491830	10/50
100	491335	491835	10/50

STANDARDS

IEC/EN 60269-1
IEC/EN 60269-6
UL 248-1
UL 248-13

DIMENSIONS
PAGE 23 (10x38)
PAGE 25 (14x51)
PAGE 27 (22x58)

t-I | CUT-OFF CHARACTERISTICS
PAGE 24 (10x38)
PAGE 26 (14x51)
PAGE 28 (22x58)

USE IN PMX MODULAR FUSE HOLDERS
PAGE 59

RAPIDPLUS

HIGH SPEED FUSE LINKS FOR SEMICONDUCTORS

NH gS NH 690V fuse links

RAPIDPLUS NH gS fuse links are capable to clearing all types of overcurrents, overloads as well as short-circuits, thus the fuse links protect semiconductors as well as cables and all switchgear of installation. They are optimized to have reduced power dissipations that allow the utilization of a wide range of fuse-bases and fuse-switch disconnectors. RAPIDPLUS NH gS range comprise five sizes NH000, NH00, NH1, NH2 and NH3 with rated currents between 20A and 630A and a rated voltage of 690V AC. Typical application comprise protection of semiconductors (diodes, thyristors, triacs, etc) used in power rectifiers, UPS, converters, motor drives, soft starters, solid state relays, photovoltaic inverters, welding inverters and any application where it is necessary to protect semiconductor devices.

NH000

U: 690V AC

BREAKING CAPACITY: 100kA / 30kA @440V DC

In (A)	REFERENCE	PACKING Uni /BOX
20	**371025**	3/90
25	**371030**	3/90
32	**371035**	3/90
40	**371045**	3/90
50	**371050**	3/90
63	**371055**	3/90
80	**371060**	3/90
100	**371065**	3/90

NH00

U: 690V AC

BREAKING CAPACITY: 100kA / 30kA @440V DC

125	**371070**	3/60
160	**371075**	3/60

NH1

U: 690V AC

BREAKING CAPACITY: 100kA / 30kA @550V DC

125	**371250**	3/30
160	**371255**	3/30
200	**371260**	3/30
250	**371270**	3/30
280	**371273**	3/30

STANDARDS

IEC/EN 60269-1
IEC/EN 60269-4

DIMENSIONS

PAGE 29 (NH000) (NH00)
PAGE 31 (NH1)

t-I | CUT-OFF CHARACTERISTICS

PAGE 30 (NH000) (NH00)
PAGE 32 (NH1)

RAPIDPLUS

HIGH SPEED FUSE LINKS FOR SEMICONDUCTORS

NH

gS NH 690V fuse links

RAPIDPLUS gR fuse links are capable to clearing all types of overcurrents, overloads as well as short-circuits, thus the fuse links protect semiconductors as well as cables and all switchgear of installation. Typical application comprise protection of semiconductors (diodes, thyristors, triacs, etc) used in power rectifiers, UPS, converters, motor drives (AC and DC), soft starters, solid state relays, photovoltaic inverters, welding inverters and any application where it is necessary to protect semiconductor devices. UL certification according to UL248 standard. UL file Nr. E477155.

NH2

U **690V AC**

BREAKING CAPACITY **100kA** **30kA @550V DC**

250	**371360**	3/18
315	**371370**	3/18
355	**371375**	3/18
400	**371380**	3/18
450	**371387**	3/18

NH3

U **690V AC**

BREAKING CAPACITY **100kA** **30kA @550V DC**

355	**371450**	1/15
400	**371455**	1/15
450	**371463**	1/15
500	**371465**	1/15
630	**371470**	1/15

STANDARDS

IEC/EN 60269-1
IEC/EN 60269-4

DIMENSIONS

PAGE 33 NH2
PAGE 35 NH3

t-I | CUT-OFF CHARACTERISTICS

PAGE 34 NH2
PAGE 36 NH3

RAPIDPLUS

HIGH SPEED FUSE LINKS FOR SEMICONDUCTORS

NH gS NH 800V fuse links

These knife type (NH) fuse links with high breaking capacity are intended for protection of the output side of new generation of photovoltaic inverters, with output voltage of 800V AC. They are also adequate for the protection of 690V AC capacitor banks. They are gG class and provide protection against overloads and short-circuits with rated voltages up to 800V +10%. The rated breaking capacity is 80kA. They have a low values of power dissipations. Manufactured with ceramic body with high withstand to internal pressuree and thermal shock, that allows a high breaking capacity. Knife contacts are made of silver plated copper or brass.

Can be mounted in open-type ST fuse bases or in fuse disconnectors type BS.

NH00

U 800V AC

BREAKING CAPACITY 120kA

In (A)	REFERENCE	PACKING Uni /BOX
25	**369030**	3
35	**369035**	3
40	**369045**	3
50	**369050**	3
63	**369055**	3
80	**369060**	3
100	**369065**	3

NH1

U 800V AC

BREAKING CAPACITY 120kA

In (A)	REFERENCE	PACKING Uni /BOX
100	**369245**	3
125	**369250**	3
160	**369255**	3
200	**369260**	3

NH3

U 800V AC

BREAKING CAPACITY 120kA

In (A)	REFERENCE	PACKING Uni /BOX
250	**369435**	1
315	**369445**	1
355	**369450**	1
400	**369455**	1

STANDARDS

IEC/EN 60269-1
IEC/EN 60269-4

DIMENSIONS

PAGE 37 NH00
PAGE 39 NH1
PAGE 41 NH3

t-I | CUT-OFF CHARACTERISTICS

PAGE 38 NH00
PAGE 40 NH1
PAGE 42 NH3

RAPIDPLUS

HIGH SPEED FUSE LINKS FOR SEMICONDUCTORS

NH | aR NH fuse links

RAPIDPLUS NH aR fuse-links have a very low I^2t values thanks to the special melting elements design, manufactured with pure silver. The sand is solidified in order to have a good arcing control, high breaking capacity and excellent capability for cyclic loads. These fuse-links have a trip indicator that can be used as a visual indication or can be equipped with a microswitch mounted directly on the fuse-link. Typical application comprise protection of semiconductors (diodes, thyristors, triacs, etc) used in power rectifiers, UPS, converters, motor drives, soft starters, solid state relays, photovoltaic inverters, welding inverters and any application where it is necessary to protect power semiconductor devices.

NH000

U: 690V AC

BREAKING CAPACITY: 120kA / 30kA @440V DC

In (A)	REFERENCE	PACKING Uni /BOX
16	**365020**	3/90
20	**365025**	3/90
25	**365030**	3/90
32	**365035**	3/90
40	**365045**	3/90
50	**365050**	3/90
63	**365055**	3/90
80	**365060**	3/90
100	**365065**	3/90
125	**365070**	3/90
160	**365075**	3/90
200	**365080**	3/90
250	**365085**	3/90

NH1

U: 690V AC

BREAKING CAPACITY: 120kA / 30kA @550V DC

40	**365225**	3/30
50	**365230**	3/30
63	**365235**	3/30
80	**365240**	3/30
100	**365245**	3/30
125	**365250**	3/30
160	**365255**	3/30
200	**365260**	3/30
250	**365270**	3/30
315	**365280**	3/30
350	**365282**	3/30
400	**365290**	3/30

STANDARDS
IEC/EN 60269-1
IEC/EN 60269-4

DIMENSIONS
PAGE 43 (NH000)
PAGE 45 (NH1)

t-I | CUT-OFF CHARACTERISTICS
PAGE 44 (NH000)
PAGE 46 (NH1)

FUSE LOAD CONSTANT C_L
PAGE 60

RAPIDPLUS

HIGH SPEED FUSE LINKS FOR SEMICONDUCTORS

NH aR NH fuse links

RAPIDPLUS NH aR fuse-links have a very low I^2t values thanks to the special melting elements design, manufactured with pure silver. The sand is solidified in order to have a good arcing control, high breaking capacity and excellent capability for cyclic loads. These fuse-links have a trip indicator that can be used as a visual indication or can be equipped with a microswitch mounted directly on the fuse-link. Typical application comprise protection of semiconductors (diodes, thyristors, triacs, etc) used in power rectifiers, UPS, converters, motor drives, soft starters, solid state relays, photovoltaic inverters, welding inverters and any application where it is necessary to protect power semiconductor devices.

NH2

U	690V AC
BREAKING CAPACITY	120kA 30kA @550V DC

200	**365350**	3/18
250	**365360**	3/18
315	**365370**	3/18
350	**365372**	3/18
400	**365380**	3/18
450	**365387**	3/18
500	**365390**	3/18
550	**365392**	3/18
630	**365395**	3/18
700	**365397**	3/18

NH3

U	690V AC
BREAKING CAPACITY	120kA 30kA @550V DC

500	**365465**	1/15
550	**365467**	1/15
630	**365470**	1/15
700	**365472**	1/15
800	**365475**	1/15
900	**365480**	1/15
1000	**365485**	1/15

STANDARDS
IEC/EN 60269-1
IEC/EN 60269-4

DIMENSIONS
PAGE 47 NH2
PAGE 49 NH3

t-I | CUT-OFF CHARACTERISTICS
PAGE 48 NH2
PAGE 50 NH3

FUSE LOAD CONSTANT C_L
PAGE 60

RAPIDPLUS

HIGH SPEED FUSE LINKS FOR SEMICONDUCTORS

SQB square body fuse links

RAPIDPLUS SQUARE BODY (SQB) aR fuse links are specially designed for protection of power semiconductor devices. Typical application comprise protection of diodes, thyristors, triacs and IGBTs, used in power rectifiers, UPS, converters, motor drives, soft starters, solid state relays, photovoltaic inverters, welding inverters and any application in power electronics, where it is necessary to protect power semiconductor devices. Thanks to the design of their melting elements, the materials employed and their construction with solidified sand, these fuses provide excellent characteristics:

- Ultra-fast acting.
- Very good current limiting.
- Very low I^2t values.
- High breaking capacity.
- Excellent cycling capability.

SQB1 | FLUSH END CONTACT

U	690V AC
BREAKING CAPACITY	120kA

In (A)	REFERENCE	PACKING Uni /BOX
80	**250325**	3/36
100	**250330**	3/36
125	**250335**	3/36
160	**250340**	3/36
200	**250345**	3/36
250	**250350**	3/36
315	**250355**	3/36
350	**250360**	3/36
400	**250365**	3/36
450	**250370**	3/36
500	**250375**	3/36
550	**250380**	3/36
630	**250385**	3/36
700	**250390**	3/36
800	**250395**	3/36

SQB1 | BLADE CONTACT 80mm

U	690V AC
BREAKING CAPACITY	120kA

In (A)	REFERENCE	PACKING Uni /BOX
80	**251325**	3/21
100	**251330**	3/21
125	**251335**	3/21
160	**251340**	3/21
200	**251345**	3/21
250	**251350**	3/21
315	**251355**	3/21
350	**251360**	3/21
400	**251365**	3/21
450	**251370**	3/21
500	**251375**	3/21
550	**251380**	3/21
630	**251385**	3/21
700	**251390**	3/21
800	**251395**	3/21

STANDARDS

IEC/EN 60269-1
IEC/EN 60269-4
UL 248-1
UL248-13

DIMENSIONS

PAGE 51
PAGE 52

t-I | CUT-OFF CHARACTERISTICS

PAGE 54

RAPIDPLUS

HIGH SPEED FUSE LINKS FOR SEMICONDUCTORS

SQB square body fuse links

RAPIDPLUS SQUARE BODY (SQB) aR fuse links are specially designed for protection of power semiconductor devices. Typical application comprise protection of diodes, thyristors, triacs and IGBTs, used in power rectifiers, UPS, converters, motor drives, soft starters, solid state relays, photovoltaic inverters, welding inverters and any application in power electronics, where it is necessary to protect power semiconductor devices. Thanks to the design of their melting elements, the materials employed and their construction with solidified sand, these fuses provide excellent characteristics:

· Ultra-fast acting.
· Very good current limiting.
· Very low I^2t values.
· High breaking capacity.
· Excellent cycling capability

SQB1 | BLADE CONTACT 110mm

U 690V AC

BREAKING CAPACITY 120kA

In (A)	REFERENCE	PACKING Uni /BOX
80	**252325**	3/12
100	**252330**	3/12
125	**252335**	3/12
160	**252340**	3/12
200	**252345**	3/12
250	**252350**	3/12
315	**252355**	3/12
350	**252360**	3/12
400	**252365**	3/12
450	**252370**	3/12
500	**252375**	3/12
550	**252380**	3/12
630	**252385**	3/12
700	**252390**	3/12
800	**252395**	3/12

SQB | FLUSH END CONTACT | BLADE CONTACT 80mm | BLADE CONTACT 110mm

U 250V AC

I_N 4 A

REFERENCE	DESCRIPTION	PACKING Uni /BOX
357015	MICROSWITCH SYSTEM* FOR aR 690 V SQUARE BODY FUSES	1/10

* Kit includes the striker support, two fixing screws and the microswitch ref.357020

STANDARDS

IEC/EN 60269-1
IEC/EN 60269-4
UL 248-1
UL248-13

DIMENSIONS PAGE 53

t-I | CUT-OFF CHARACTERISTICS PAGE 54

RAPIDPLUS

HIGH SPEED FUSE LINKS FOR SEMICONDUCTORS

SQB square body fuse links

RAPIDPLUS SQUARE BODY (SQB) aR fuse links are specially designed for protection of power semiconductor devices. Typical application comprise protection of diodes, thyristors, triacs and IGBTs, used in power rectifiers, UPS, converters, motor drives, soft starters, solid state relays, photovoltaic inverters, welding inverters and any application in power electronics, where it is necessary to protect power semiconductor devices. Thanks to the design of their melting elements, the materials employed and their construction with solidified sand, these fuses provide excellent characteristics:

· Ultra-fast acting.
· Very good current limiting.
· Very low I^2t values.
· High breaking capacity.
· Excellent cycling capability.

SQB3 | FLUSH END CONTACT

U	690V AC
BREAKING CAPACITY	120kA

In (A)	REFERENCE	PACKING Uni /BOX
500	**250525**	3
550	**250530**	3
630	**250535**	3
700	**250540**	3
800	**250545**	3
900	**250550**	3
1000	**250555**	3
1100	**250560**	3
1250	**250565**	3
1400	**250570**	3

SQB3 | BLADE CONTACT 80mm

U	690V AC
BREAKING CAPACITY	120kA

In (A)	REFERENCE	PACKING Uni /BOX
500	**251525**	1
550	**251530**	1
630	**251535**	1
700	**251540**	1
800	**251545**	1
900	**251550**	1
1000	**251555**	1
1100	**251560**	1
1250	**251565**	1
1400	**251570**	1

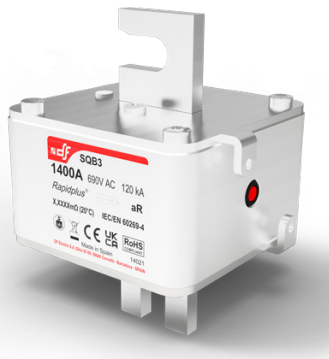

STANDARDS

IEC/EN 60269-1
IEC/EN 60269-4
UL 248-1
UL248-13

DIMENSIONS

PAGE 55
PAGE 56

t-I | CUT-OFF CHARACTERISTICS

PAGE 58

RAPIDPLUS

HIGH SPEED FUSE LINKS FOR SEMICONDUCTORS

SQB square body fuse links

RAPIDPLUS SQUARE BODY (SQB) aR fuse links are specially designed for protection of power semiconductor devices. Typical application comprise protection of diodes, thyristors, triacs and IGBTs, used in power rectifiers, UPS, converters, motor drives, soft starters, solid state relays, photovoltaic inverters, welding inverters and any application in power electronics, where it is necessary to protect power semiconductor devices. Thanks to the design of their melting elements, the materials employed and their construction with solidified sand, these fuses provide excellent characteristics:

· Ultra-fast acting.
· Very good current limiting.
· Very low I^2t values.
· High breaking capacity.
· Excellent cycling capability

SQB3 | BLADE CONTACT 110mm

U	690V AC
BREAKING CAPACITY	120kA

I_n (A)	REFERENCE	PACKING Uni /BOX
500	**252525**	1
550	**252530**	1
630	**252535**	1
700	**252540**	1
800	**252545**	1
900	**252550**	1
1000	**252555**	1
1100	**252560**	1
1250	**252565**	1
1400	**252570**	1

SQB | FLUSH END CONTACT | BLADE CONTACT 80mm | BLADE CONTACT 110mm

U	250V AC
I_N	4 A

REFERENCE	DESCRIPTION	PACKING Uni /BOX
357015	MICROSWITCH SYSTEM* FOR aR 690 V SQUARE BODY FUSES	1/10

* Kit includes the striker support, two fixing screws and the microswitch ref.357020

STANDARDS

IEC/EN 60269-1
IEC/EN 60269-4
UL 248-1
UL248-13

DIMENSIONS

PAGE 57

t-I | CUT-OFF CHARACTERISTICS

PAGE 58

RAPIDPLUS

HIGH SPEED FUSE LINKS FOR SEMICONDUCTORS

CYL 10x85

gS CYLINDRICAL fuse links

RATED VOLTAGE	RATED CURRENT	BREAKING CAPACITY
1000V AC/DC	1A...20A	30kA AC 10kA DC



DIMENSIONS

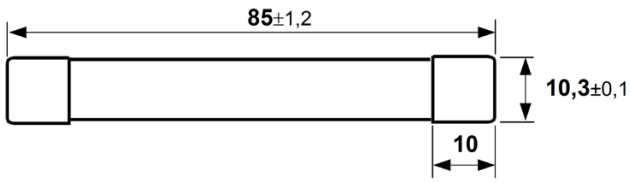

I²t CORRECTION FACTOR (K)

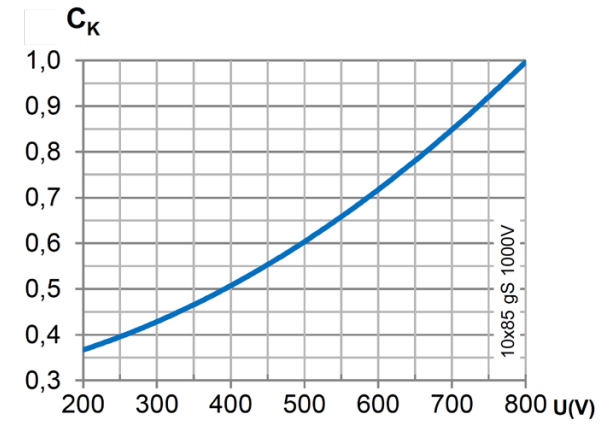

POWER DISSIPATION

I_n	PREARCING I^2t	OPERATING I^2t @1000V	POWER LOSS $0.8 \cdot I_n$	POWER LOSS I_n
(A)	(A^2S)	(A^2S)	(W)	(W)
1	0,2	0,42	0,45	0,75
2	2	4,4	0,6	1
3	14	19	0,65	1,1
4	41	56	0,7	1,2
5	80	107	0,77	1,3
6	12	44	0,89	1,5
8	46	176	0,93	1,6
10	74	240	1	1,7
12	145	470	1,06	1,8
16	190	615	1,82	3,1
20	415	1380	1,95	3,3

CORRECTION FACTOR FOR POWER LOSS (Cp)

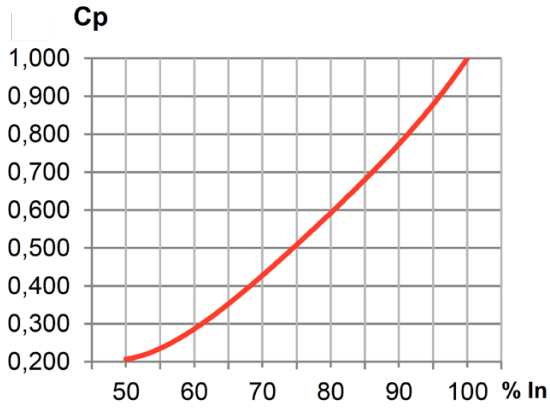

RAPIDPLUS

HIGH SPEED FUSE LINKS FOR SEMICONDUCTORS

CYL 10x85

gS CYLINDRICAL fuse links

t-I CHARACTERISTICS

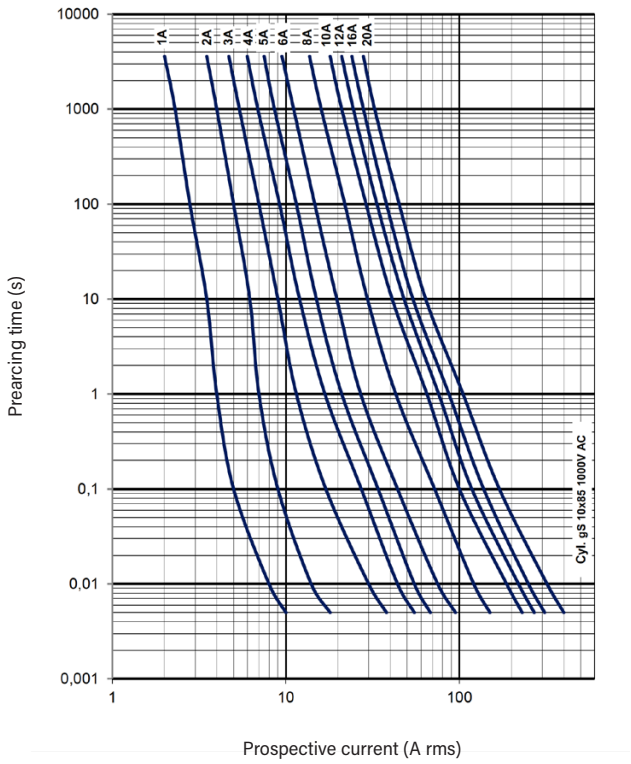

CUT-OFF CHARACTERISTICS

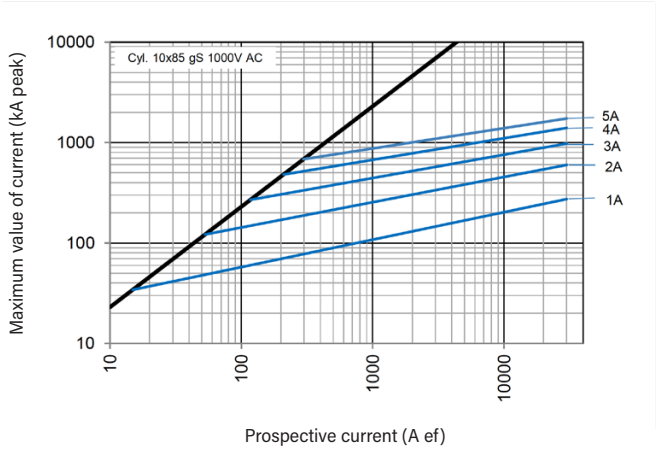

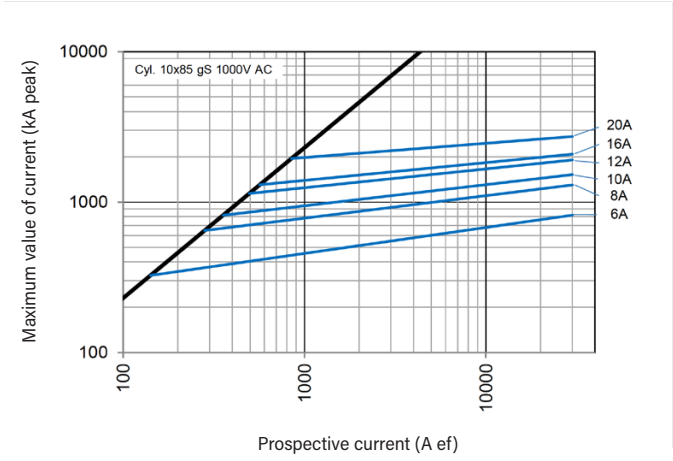

RAPIDPLUS

HIGH SPEED FUSE LINKS FOR SEMICONDUCTORS

CYL 10x38

gR CYLINDRICAL fuse links

RATED VOLTAGE	RATED CURRENT	BREAKING CAPACITY
690V AC UL/IEC 440V DC IEC	1A...32A	200kA (690V AC) 30kA (440V DC)

DIMENSIONS

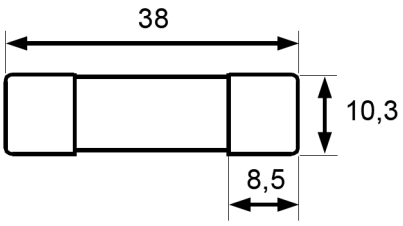

I^2t CORRECTION FACTOR (K)

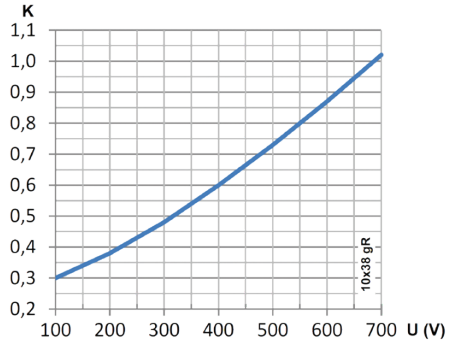

CORRECTION FACTOR FOR POWER LOSS (Cp)

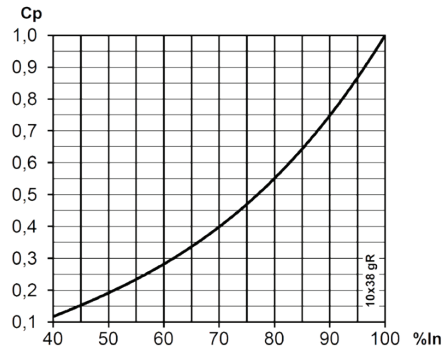

POWER DISSIPATION

I_n	I^2t PREARCING	OPERATING I^2t @690V	POWER LOSS $0.8 \cdot I_n$	POWER LOSS I_n
(A)	(A^2S)	(A^2S)	(W)	(W)
1	0,20	1,2	0,45	0,75
2	0,80	2,6	0,75	1,40
3	2,5	8,0	0,95	1,70
4	5,6	17	1,13	2,05
6	16,0	48	1,56	3,00
8	4,3	38	0,97	1,68
10	6,6	59	1,20	2,09
12	9,6	84	1,69	2,99
16	17,0	150	2,31	4,27
20	23,5	200	2,86	5,35
25	60,2	512	2,94	5,52
32	94,0	800	3,82	7,43

PEAK ARC VOLTAGE (U_L)

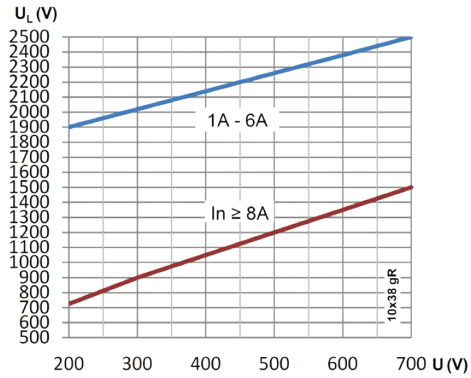

CYL 10x38

gR CYLINDRICAL fuse links

t-I CHARACTERISTICS

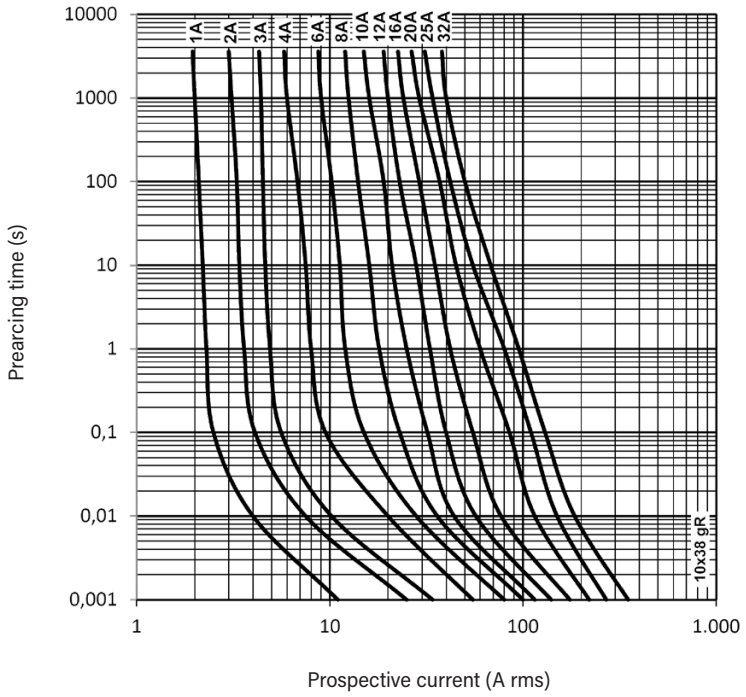

CUT-OFF CHARACTERISTICS

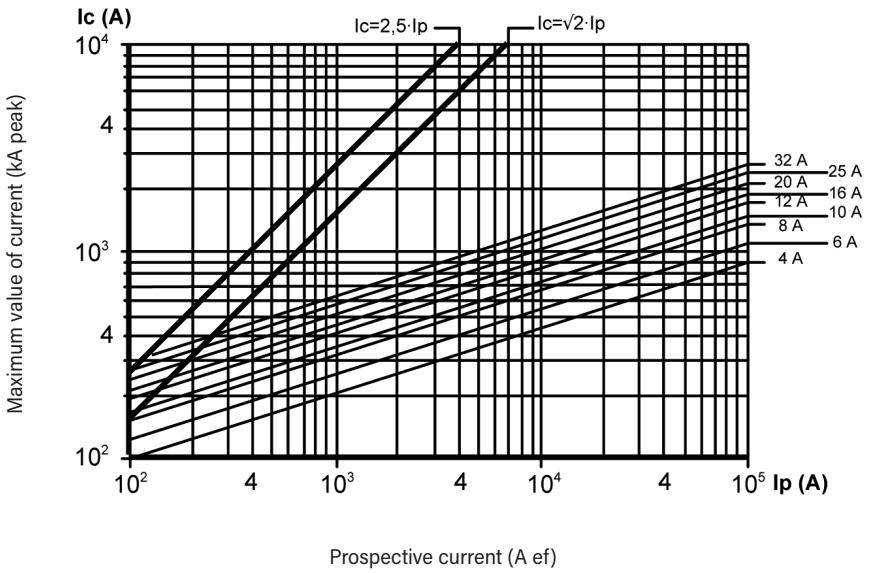

RAPIDPLUS

HIGH SPEED FUSE LINKS FOR SEMICONDUCTORS

CYL 14x51

gR CYLINDRICAL fuse links

RATED VOLTAGE	RATED CURRENT	BREAKING CAPACITY
690V AC UL/IEC 440V DC IEC	4A...50A	200kA (690V AC) 30kA (440V DC)

DIMENSIONS

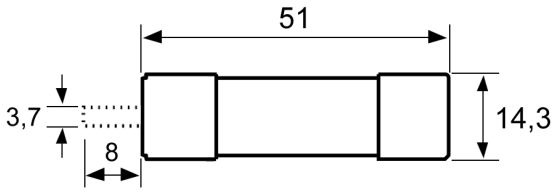

I²t CORRECTION FACTOR (K)

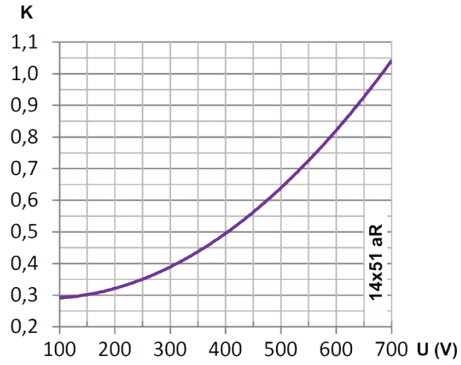

CORRECTION FACTOR FOR POWER LOSS (Cp)

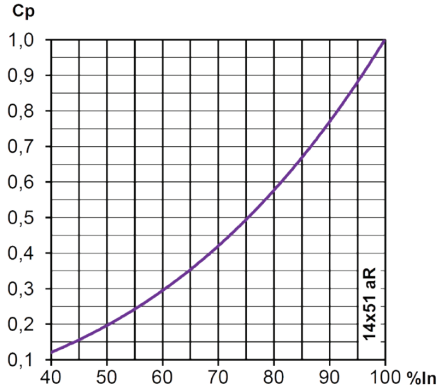

POWER DISSIPATION

I_n	I^2t PREARCING	OPERATING I^2t @690V	POWER LOSS $0.8 \cdot I_n$	POWER LOSS I_n
(A)	(A^2S)	(A^2S)	(W)	(W)
4	5,6	17	1,56	2,94
6	16,0	48	2,25	4,20
8	3,8	30	1,18	2,00
10	5,9	47	1,41	2,52
12	8,4	68	1,95	3,54
16	15	120	2,67	4,83
20	27	170	2,91	5,40
25	53	333	3,38	6,00
32	108	679	3,72	6,93
40	211	1331	4,13	7,52
50	350	2200	5,36	9,80

PEAK ARC VOLTAGE (U_L)

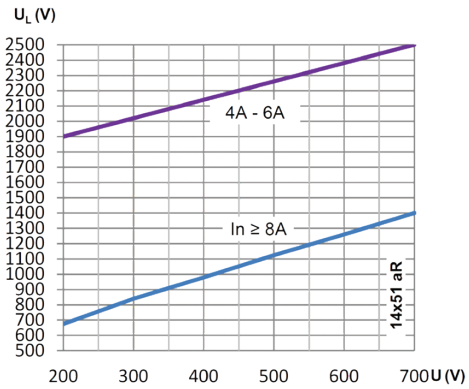

CYL 14x51

gR CYLINDRICAL fuse links

t-I CHARACTERISTICS

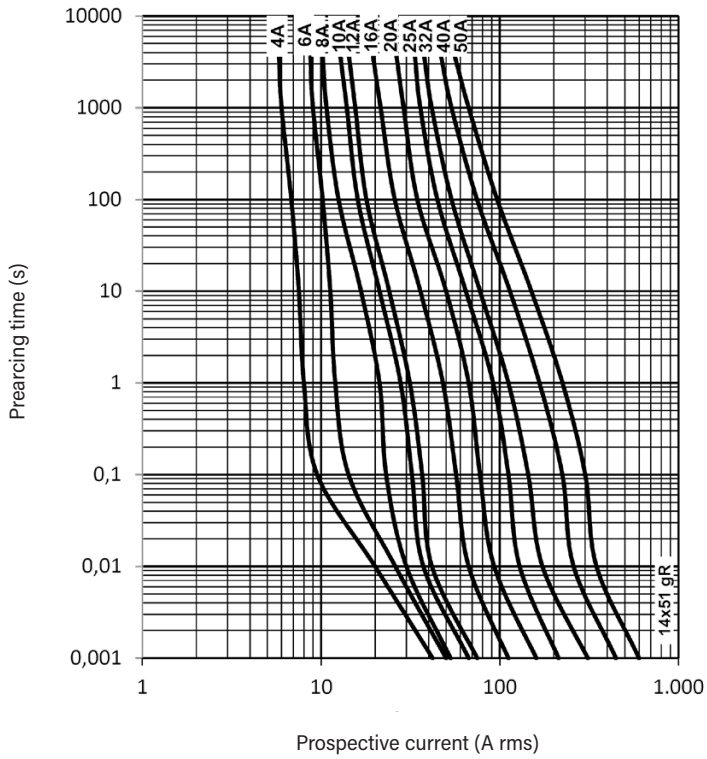

CUT-OFF CHARACTERISTICS

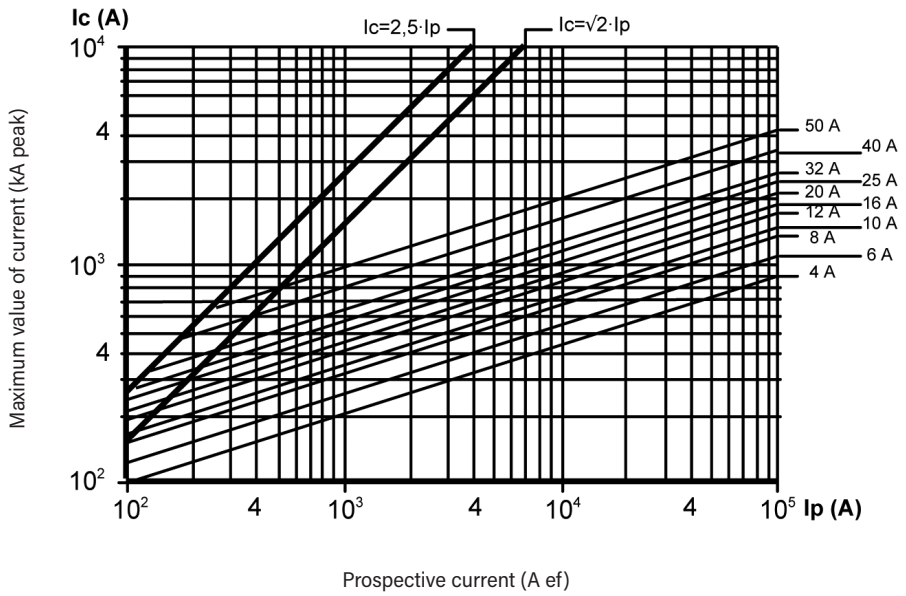

RAPIDPLUS

HIGH SPEED FUSE LINKS FOR SEMICONDUCTORS

CYL 22x58

gR CYLINDRICAL fuse links

RATED VOLTAGE	RATED CURRENT	BREAKING CAPACITY
690V AC UL/IEC 440V DC IEC	20A...100A	200kA (690V AC) 30kA (440V DC)

DIMENSIONS

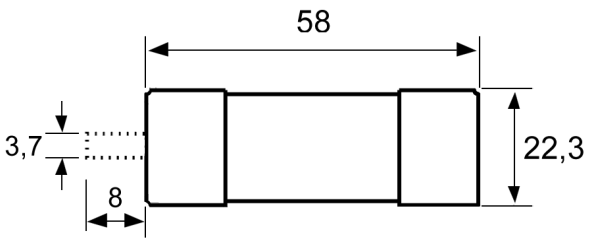

I²t CORRECTION FACTOR (K)

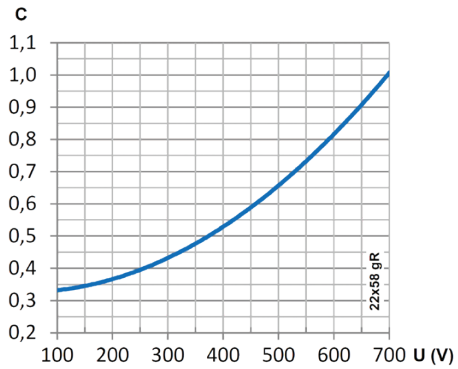

CORRECTION FACTOR FOR POWER LOSS (Cp)

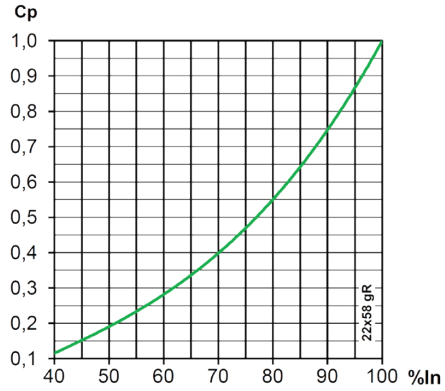

POWER DISSIPATION

I_n	I^2t PREARCING	OPERATING I^2t @690V	POWER LOSS $0.8 \cdot I_n$	POWER LOSS I_n
(A)	(A^2S)	(A^2S)	(W)	(W)
20	19	103	3,00	5,25
25	34	182	3,40	5,85
32	60	324	4,50	8,20
40	94	506	6,10	10,80
50	158	856	7,50	13,70
63	375	2025	7,70	14,00
80	634	3422	9,65	17,60
100	1500	8100	10,30	18,00

PEAK ARC VOLTAGE (U_L)

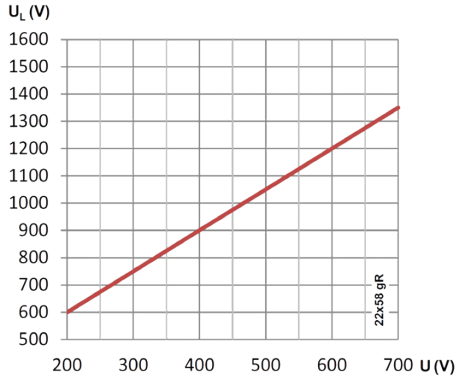

CYL 22x58

gR CYLINDRICAL fuse links

t-I CHARACTERISTICS

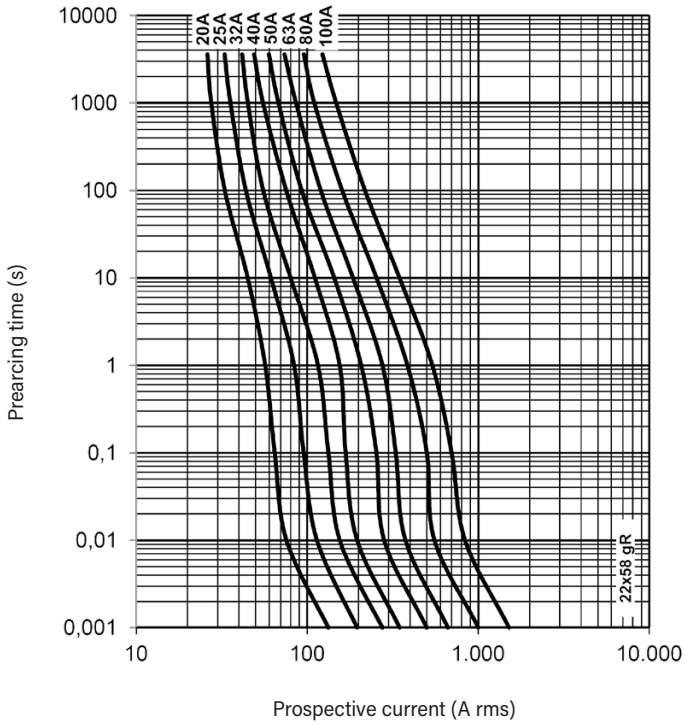

CUT-OFF CHARACTERISTICS

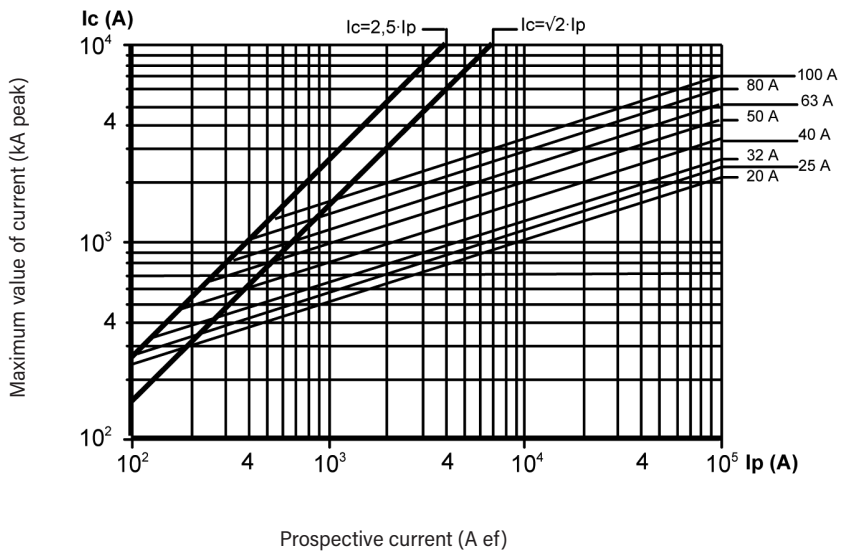

RAPIDPLUS

HIGH SPEED FUSE LINKS FOR SEMICONDUCTORS

CYL 10x38

aR CYLINDRICAL fuse links

RATED VOLTAGE	RATED CURRENT	BREAKING CAPACITY
690V AC UL/IEC 700V DC IEC	1A...32A	200kA (690V AC) 30kA (700V DC)

DIMENSIONS

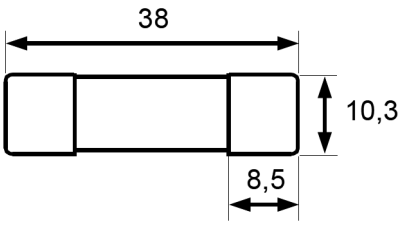

I²t CORRECTION FACTOR (K)

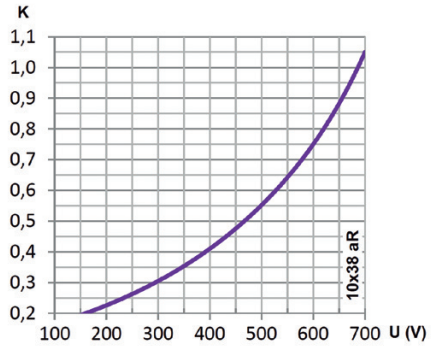

CORRECTION FACTOR FOR POWER LOSS (Cp)

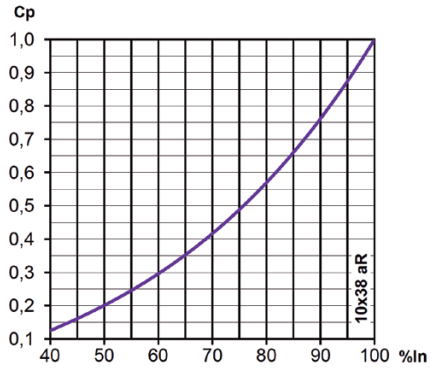

POWER DISSIPATION

I_n	I^2t PREARCING	OPERATING I^2t @690V	POWER LOSS $0.8 \cdot I_n$	POWER LOSS I_n
(A)	(A^2S)	(A^2S)	(W)	(W)
1*	0,20	1,2	0,45	0,75
2	0,80	2,6	0,75	1,40
3	2,5	8,0	0,95	1,70
4	4,9	10	0,97	1,69
6	14,0	28	1,4	2,46
8	3,0	24	0,91	1,52
10	4,7	38	1,23	2,07
12	6,8	54	1,53	2,62
16	12,0	96	2,11	3,72
20	18,8	150	2,57	4,50
25	48,0	384	2,60	4,55
32	75,0	600	3,65	6,65

* not UL certified

PEAK ARC VOLTAGE (U_L)

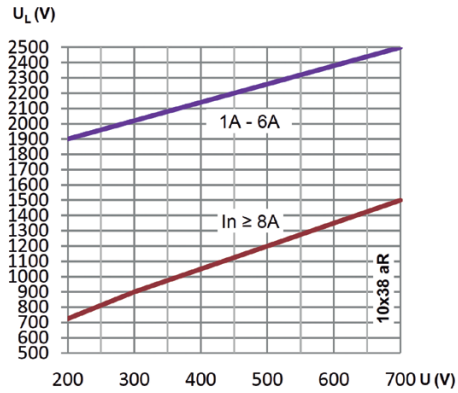

RAPIDPLUS

HIGH SPEED FUSE LINKS FOR SEMICONDUCTORS

CYL 10x38

aR CYLINDRICAL fuse links

t-I CHARACTERISTICS

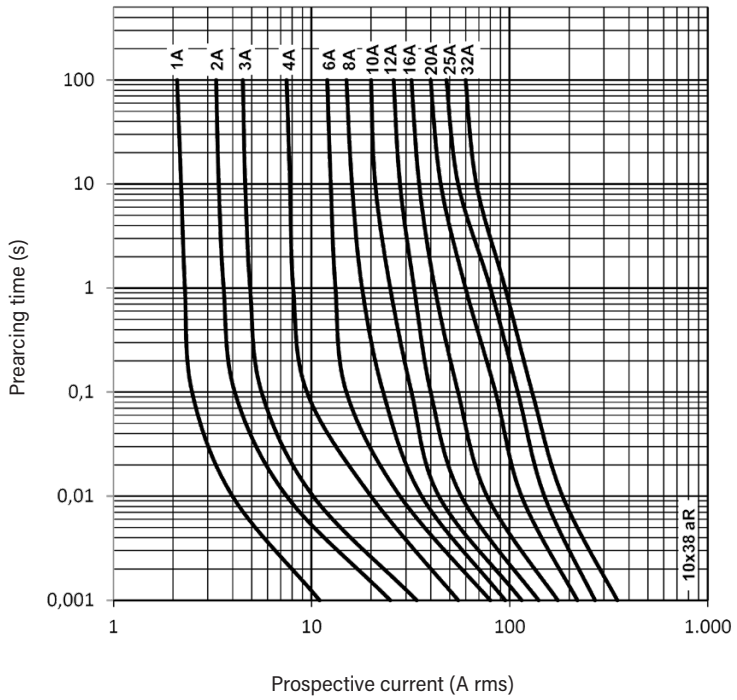

CUT-OFF CHARACTERISTICS

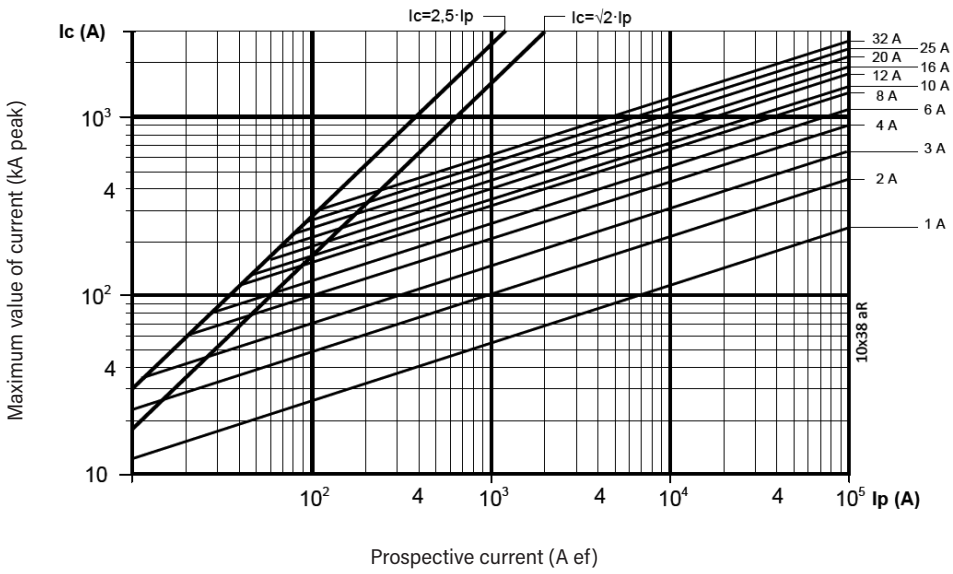

RAPIDPLUS

HIGH SPEED FUSE LINKS FOR SEMICONDUCTORS

CYL 14x51

aR CYLINDRICAL fuse links

RATED VOLTAGE	RATED CURRENT	BREAKING CAPACITY
690V AC UL/IEC 700V DC IEC	4A...50A	200kA (690V AC) 30kA (700V DC)

DIMENSIONS

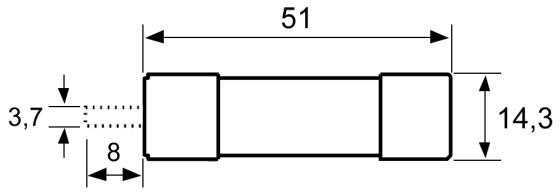

I²t CORRECTION FACTOR (K)

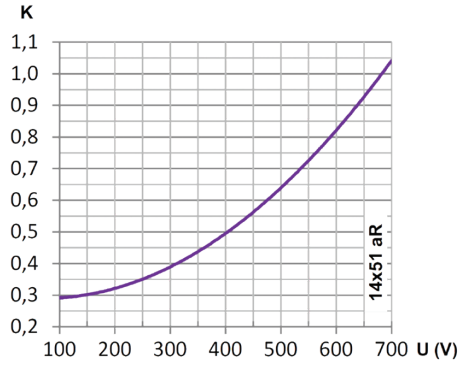

CORRECTION FACTOR FOR POWER LOSS (Cp)

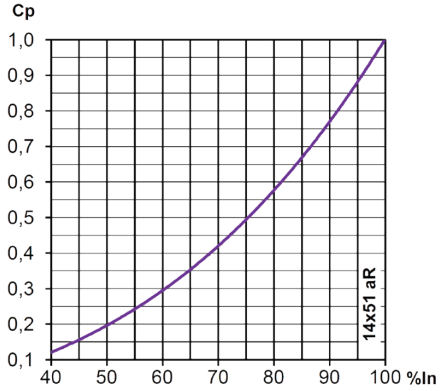

POWER DISSIPATION

I_n	I^2t PREARCING	OPERATING I^2t @690V	POWER LOSS $0.8 \cdot I_n$	POWER LOSS I_n
(A)	(A^2S)	(A^2S)	(W)	(W)
4	5,6	14	1,32	2,28
6	16,0	40	1,80	3,18
8	4,1	23	1,01	1,69
10	6,3	37	1,39	2,36
12	9,1	53	1,63	2,78
16	12,4	72	2,43	4,16
20	20,6	119	3,04	5,43
25	36,6	211	3,75	6,11
32	82,3	475	3,92	7,17
40	146,3	844	4,52	8,15
50	260,0	1500	5,60	10,6

PEAK ARC VOLTAGE (U_L)

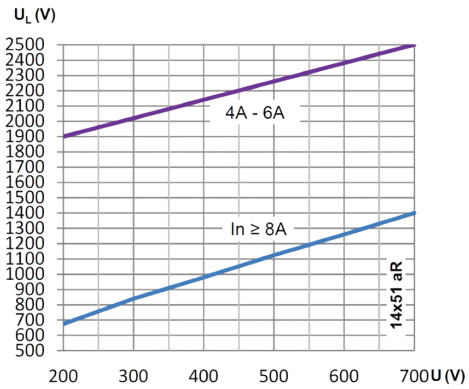

CYL 14x51

aR CYLINDRICAL fuse links

t-I CHARACTERISTICS

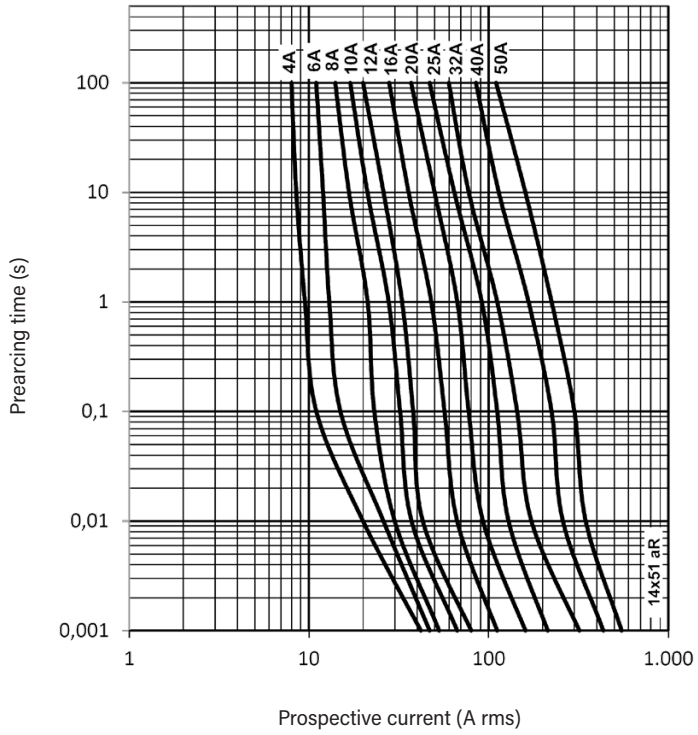

CUT-OFF CHARACTERISTICS

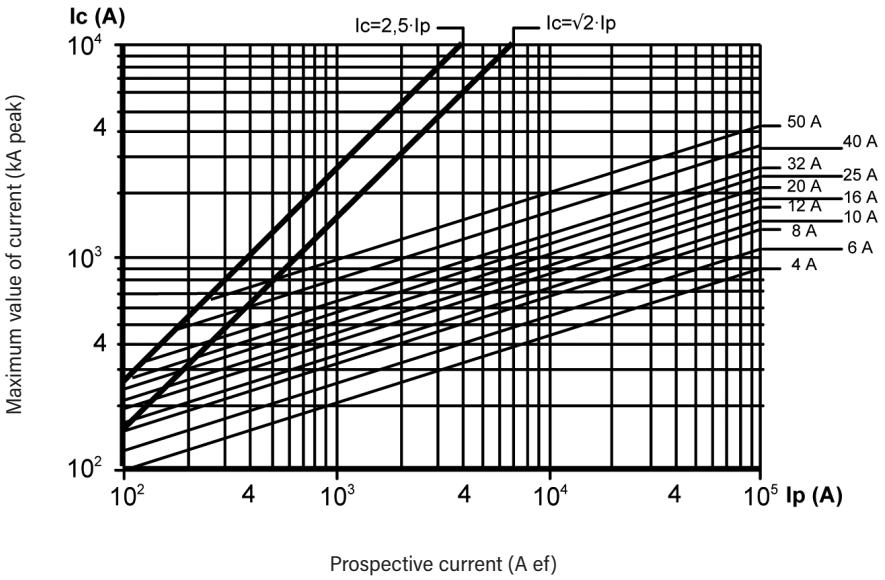

RAPIDPLUS

HIGH SPEED FUSE LINKS FOR SEMICONDUCTORS

CYL 22x58

aR CYLINDRICAL fuse links

RATED VOLTAGE	RATED CURRENT	BREAKING CAPACITY
690V AC UL/IEC 700V DC IEC	20A...100A	200kA (690V AC) 30kA (700V DC)

DIMENSIONS

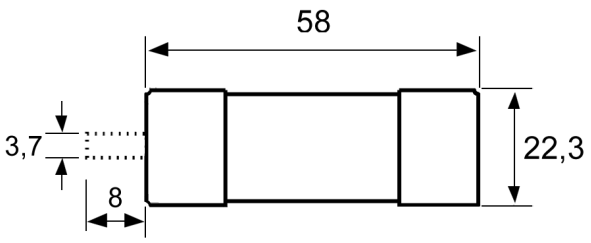

I²t CORRECTION FACTOR (K)

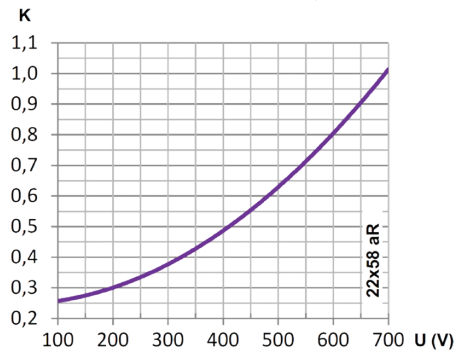

CORRECTION FACTOR FOR POWER LOSS (Cp)

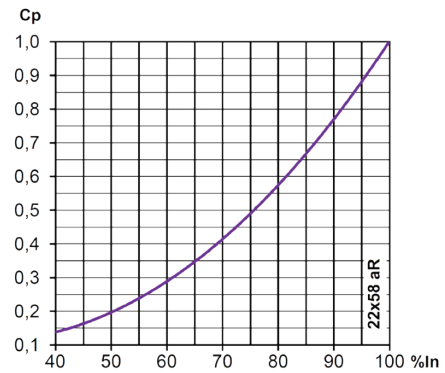

POWER DISSIPATION

I_n	I^2t PREARCING	OPERATING I^2t @690V	POWER LOSS $0.8 \cdot I_n$	POWER LOSS I_n
(A)	(A^2S)	(A^2S)	(W)	(W)
20	19	103	3,00	5,25
25	34	182	3,40	5,85
32	60	324	4,50	8,20
40	94	506	6,10	10,80
50	158	856	7,50	13,70
63	375	2025	7,70	14,00
80	634	3422	9,65	17,60
100	1500	8100	10,30	18,00

PEAK ARC VOLTAGE (U_L)

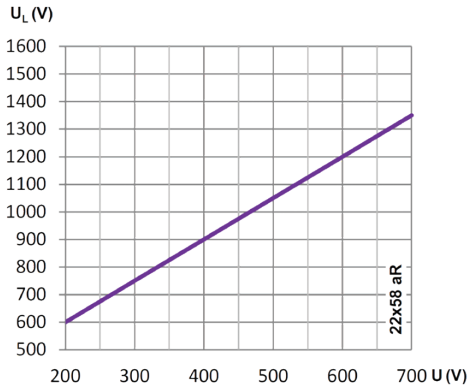

CYL 22x58

aR CYLINDRICAL fuse links

t-I CHARACTERISTICS

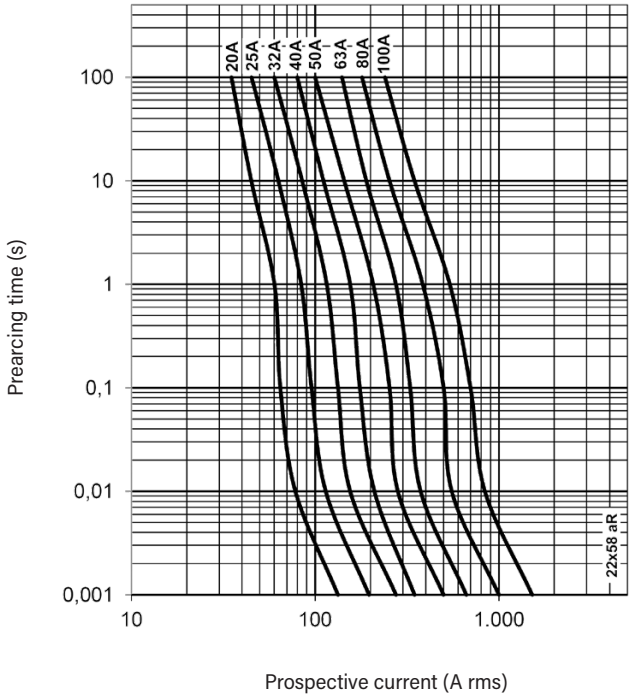

CUT-OFF CHARACTERISTICS

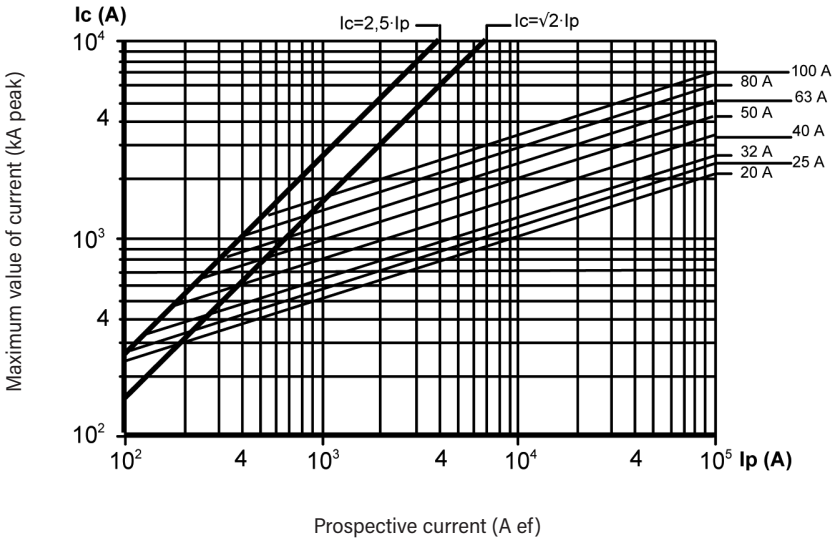

RAPIDPLUS

HIGH SPEED FUSE LINKS FOR SEMICONDUCTORS

NH NH000 NH00

gS NH 690V fuse links



RATED VOLTAGE	RATED CURRENT	BREAKING CAPACITY
690V AC	20A...160A	100kA (690V AC)
		30kA (440V DC)

DIMENSIONS

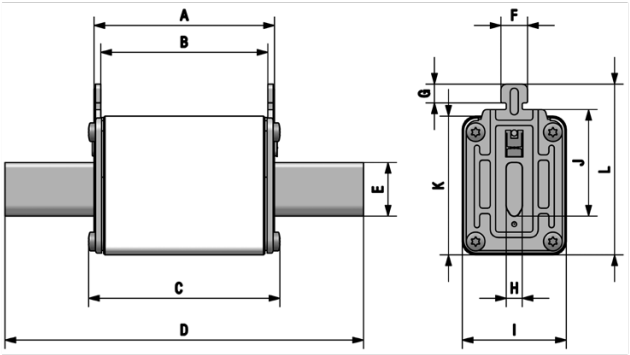

	A	B	C	D	E	F	G	H	I	J	K	L
NH000	49	45	52	78,5	15	10	9,5	6	21	35	40	53
NH00*	49	44	52	78,5	15	10	9,5	6	29	35	47	59

* only available in gS semiconductor fuse links

I^2t CORRECTION FACTOR (K)

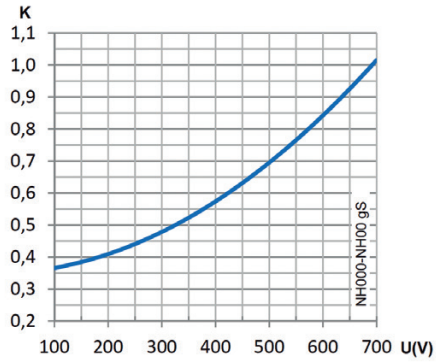

CORRECTION FACTOR FOR POWER LOSS (Cp)

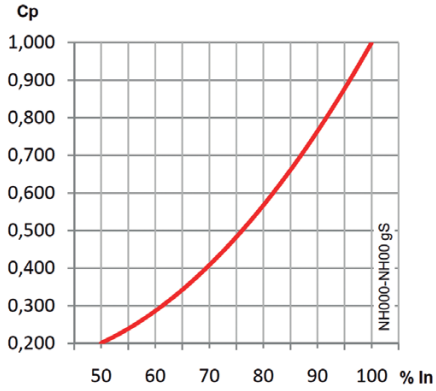

POWER DISSIPATION

	I_n (A)	I^2t PREARCING (A^2S)	OPERATING I^2t @690V (A^2S)	POWER LOSS $0.8 \cdot I_n$ (W)	POWER LOSS I_n (W)
NH000	**20**	31	116	2,9	5,1
	25	49	181	3,2	5,6
	32	96	355	3,9	6,6
	40	196	724	4,2	7,2
	50	331	1.224	5,1	8,5
	63	782	2.897	5,3	9,1
	80	1.420	5.270	6,3	11,0
	100	2.130	7.880	7,6	13,3
NH00	**125**	3.380	11.550	8,3	14,7
	160	6.400	21.840	10,5	18,2

PEAK ARC VOLTAGE (U_L)

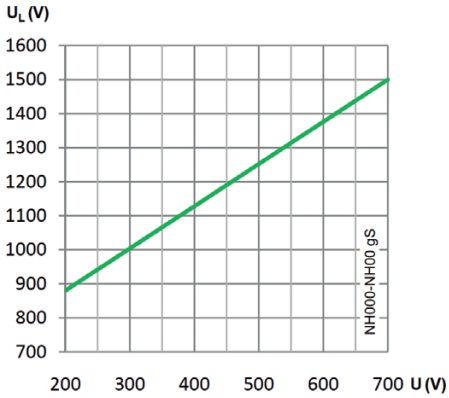

RAPIDPLUS

HIGH SPEED FUSE LINKS FOR SEMICONDUCTORS

NH NH000 NH00

gS
NH 690V
fuse links

t-I CHARACTERISTICS

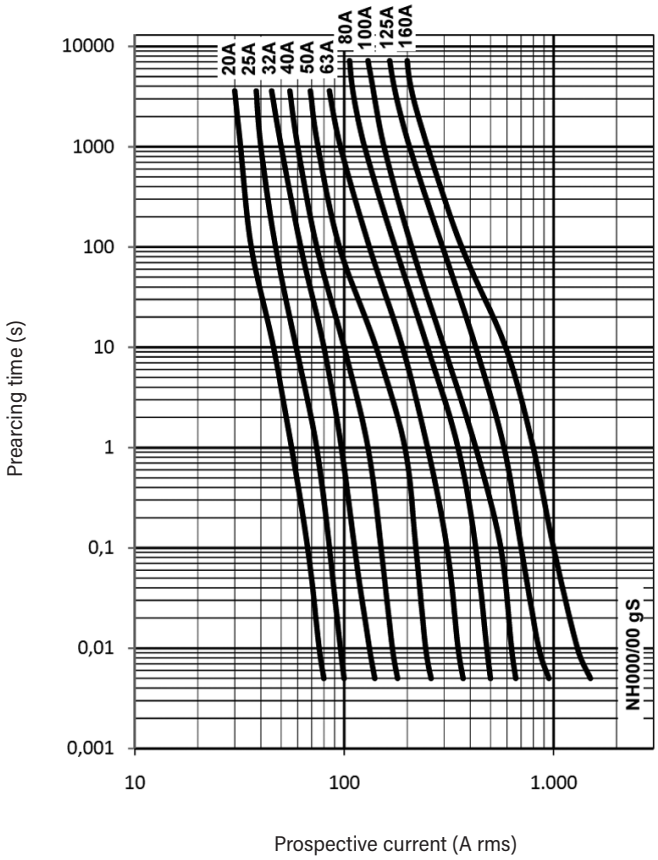

CUT-OFF CHARACTERISTICS

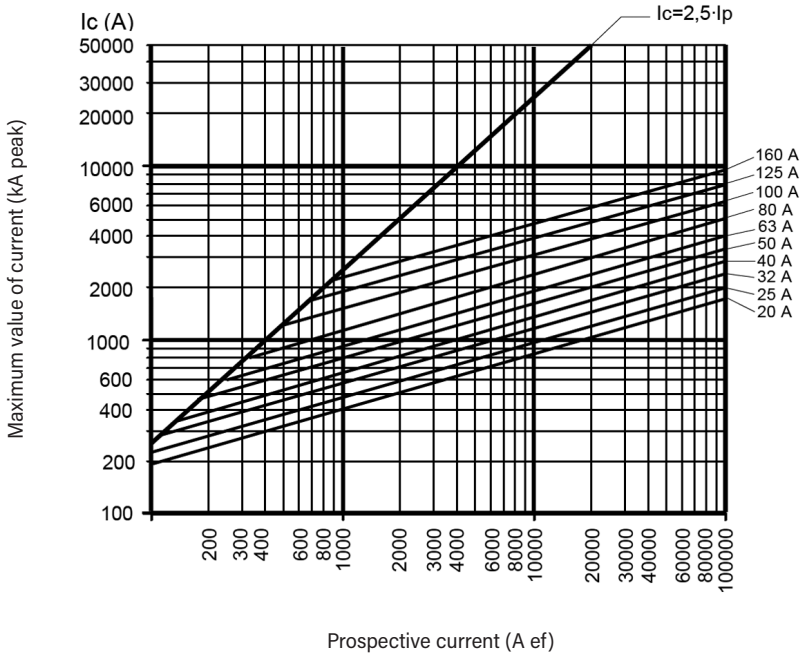

RAPIDPLUS

HIGH SPEED FUSE LINKS FOR SEMICONDUCTORS

NH NH1

gS NH 690V fuse links

RATED VOLTAGE	RATED CURRENT	BREAKING CAPACITY
690V AC	125A...280A	100kA (690V AC)
		30kA (550V DC)

DIMENSIONS

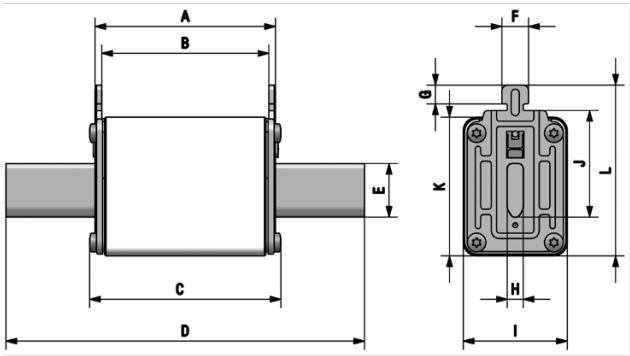

A	B	C	D	E	F	G	H	I	J	K	L
68	62	71,5	135	20	10	9,5	6	39	40	52	64

I^2t CORRECTION FACTOR (K)

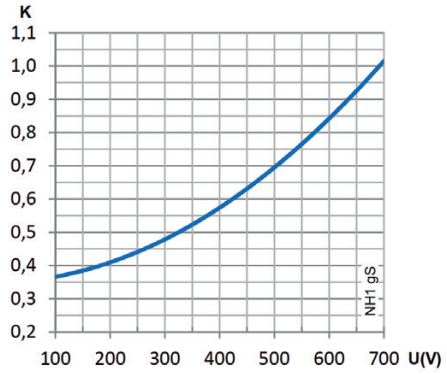

CORRECTION FACTOR FOR POWER LOSS (Cp)

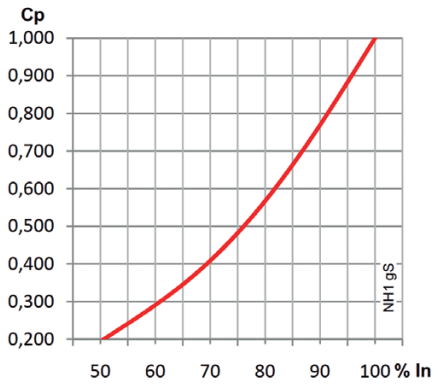

POWER DISSIPATION

I_n	I^2t PREARCING	OPERATING I^2t @690V	POWER LOSS $0.8 \cdot I_n$	POWER LOSS I_n
(A)	(A^2S)	(A^2S)	(W)	(W)
125	3.800	11.680	10,7	19,7
160	6.290	19.300	14,5	25,3
200	15.220	46.720	15	26,2
250	25.160	77.230	19,5	33,2
280	37.590	115.370	20,1	35,7

PEAK ARC VOLTAGE (U_L)

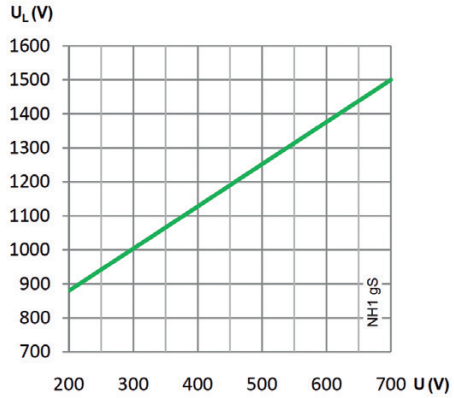

RAPIDPLUS

HIGH SPEED FUSE LINKS FOR SEMICONDUCTORS

NH NH1

gS
NH 690V
fuse links

t-I CHARACTERISTICS

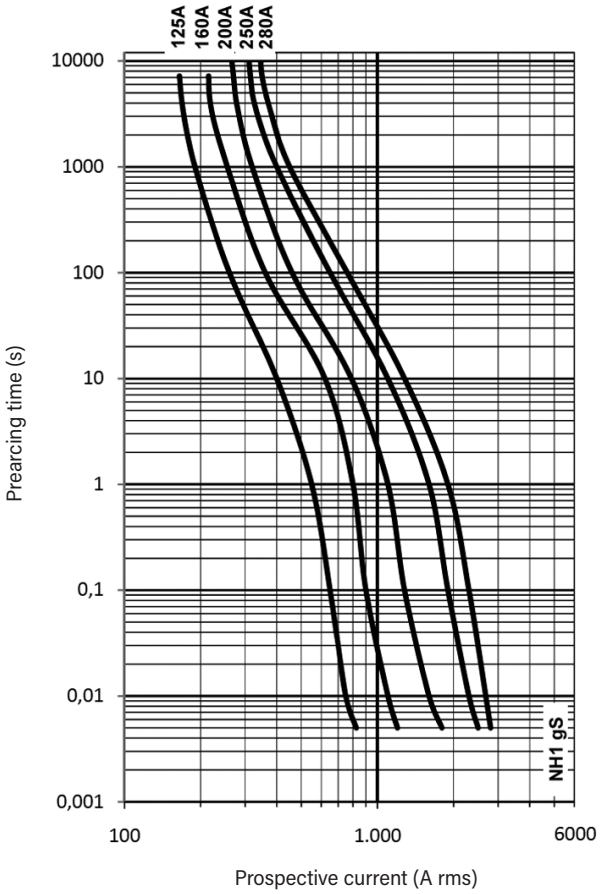

CUT-OFF CHARACTERISTICS

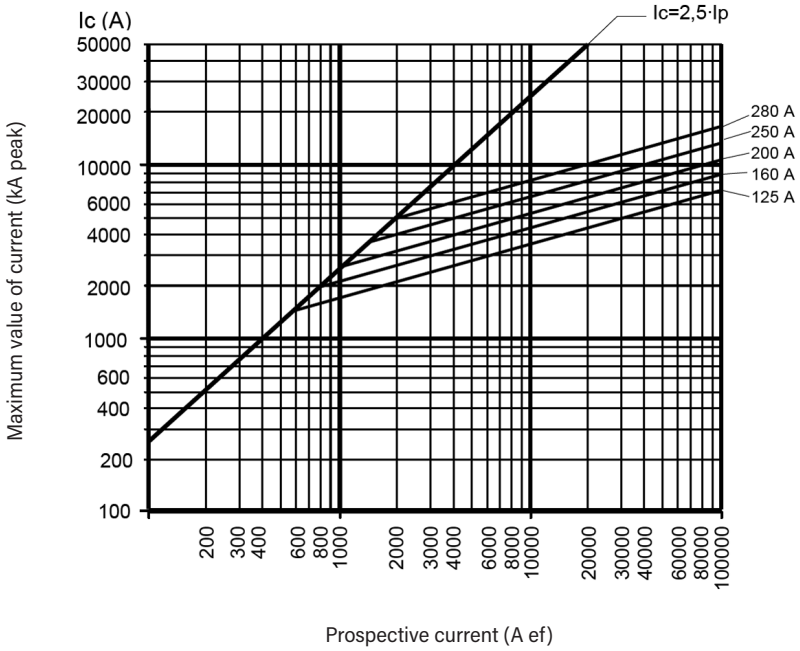

RAPIDPLUS

HIGH SPEED FUSE LINKS FOR SEMICONDUCTORS

NH NH2

gS NH 690V fuse links

RATED VOLTAGE	RATED CURRENT	BREAKING CAPACITY
690V AC	250A...450A	100kA (690V AC)
		30kA (550V DC)

DIMENSIONS

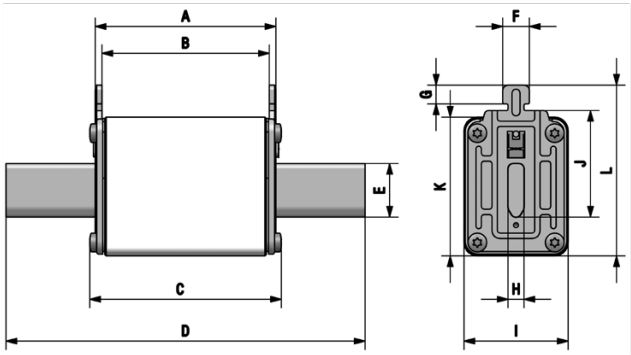

A	B	C	D	E	F	G	H	I	J	K	L
68	62	71,5	150	25	10	9,5	6	53	48	60	72

I^2t CORRECTION FACTOR (K)

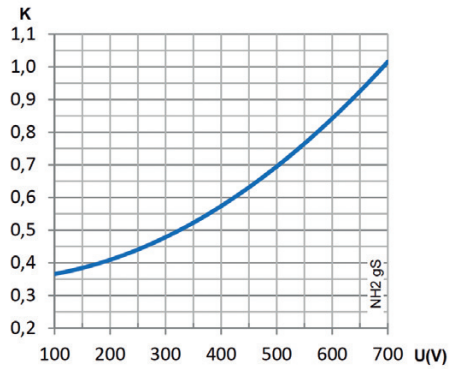

CORRECTION FACTOR FOR POWER LOSS (Cp)

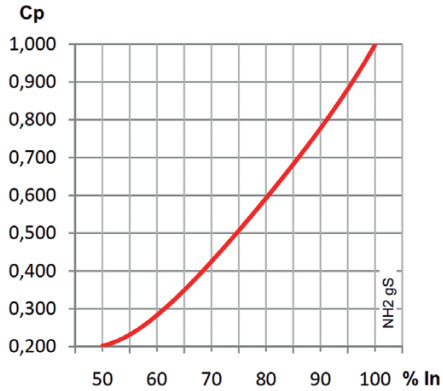

POWER DISSIPATION

I_n	I^2t PREARCING	OPERATING I^2t @690V	POWER LOSS 0.8 · I_n	POWER LOSS I_n
(A)	(A^2S)	(A^2S)	(W)	(W)
250	24.280	74.460	18,6	32,2
315	50.660	155.360	20,8	35,8
355	67.450	206.850	23,4	40,1
400	100.770	309.000	24,4	42,6
450	140.740	431.580	33,9	47,2

PEAK ARC VOLTAGE (U_L)

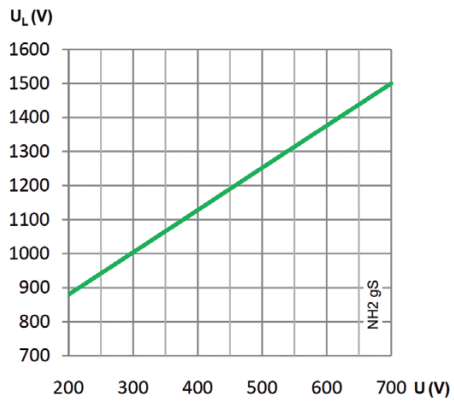

RAPIDPLUS

HIGH SPEED FUSE LINKS FOR SEMICONDUCTORS

NH NH2

gS
NH 690V
fuse links

t-I CHARACTERISTICS

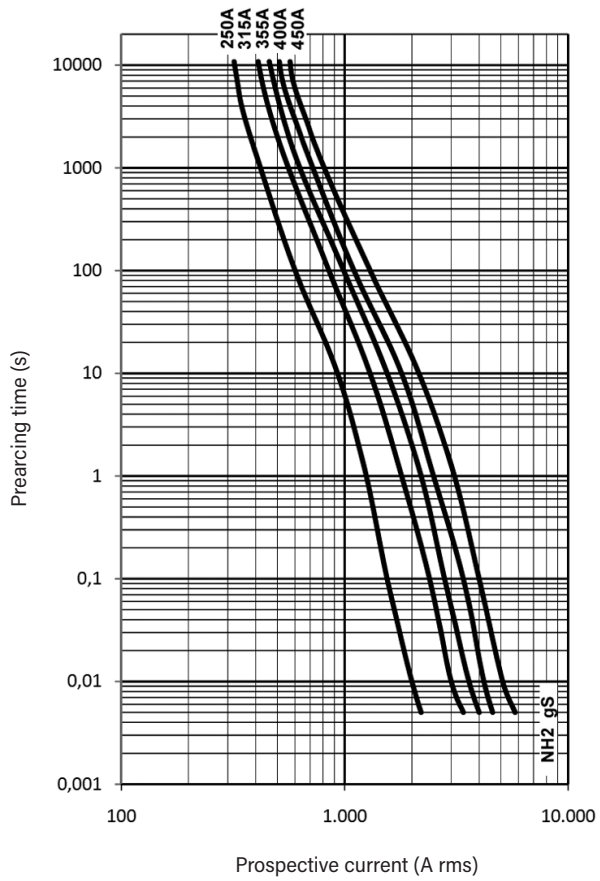

CUT-OFF CHARACTERISTICS

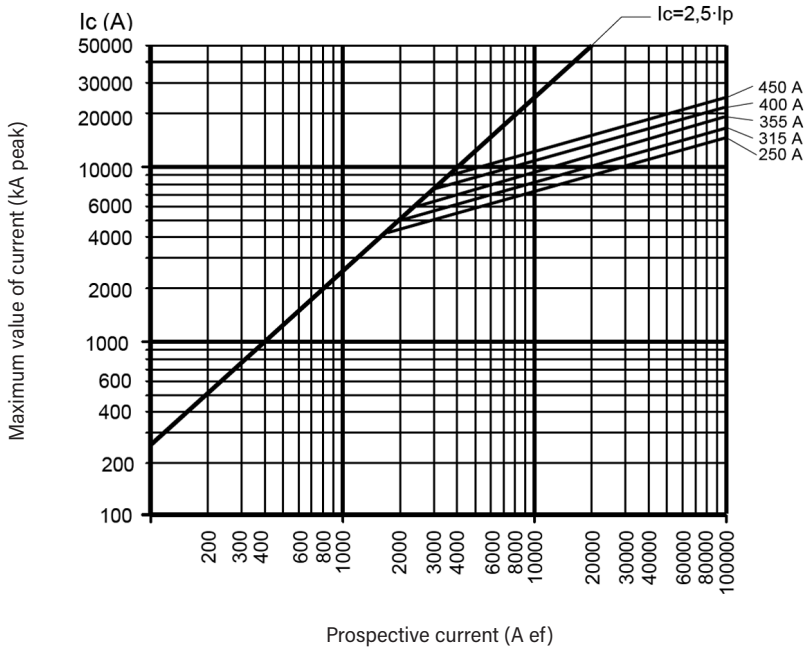

RAPIDPLUS

HIGH SPEED FUSE LINKS FOR SEMICONDUCTORS

NH NH3

gS NH 690V fuse links

RATED VOLTAGE	RATED CURRENT	BREAKING CAPACITY
690V AC	355A...630A	100kA (690V AC)
		30kA (550V DC)

DIMENSIONS

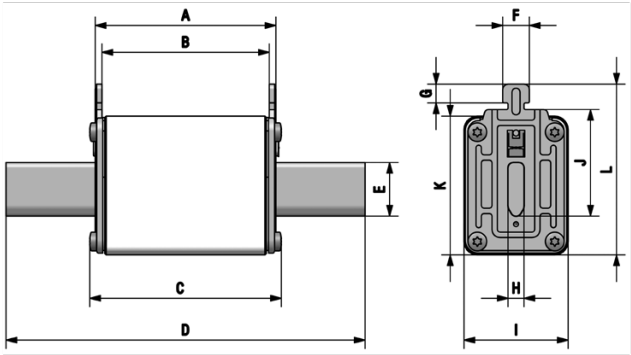

A	B	C	D	E	F	G	H	I	J	K	L
68	62	73	150	32	10	9,5	6	70	60	75	87

I^2t CORRECTION FACTOR (K)

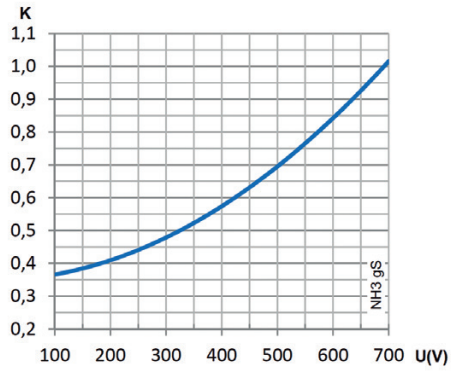

CORRECTION FACTOR FOR POWER LOSS (Cp)

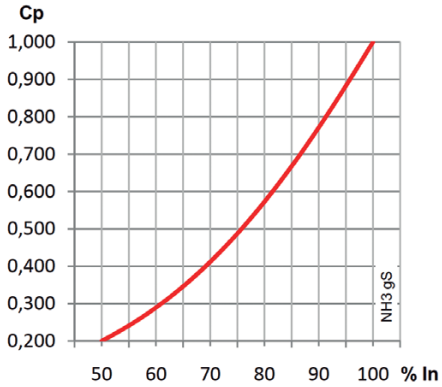

POWER DISSIPATION

I_n	I^2t PREARCING	OPERATING I^2t @690V	POWER LOSS $0.8 \cdot I_n$	POWER LOSS I_n
(A)	(A^2S)	(A^2S)	(W)	(W)
355	54.240	151.700	22,7	39,6
400	75.760	211.900	24,3	42,7
450	114.770	320.970	26,3	46,0
500	165.270	462.200	27,6	47,1
630	303.060	847.570	34,3	60,4

PEAK ARC VOLTAGE (U_L)

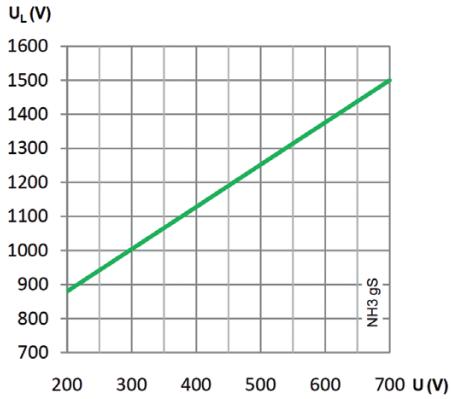

RAPIDPLUS

HIGH SPEED FUSE LINKS FOR SEMICONDUCTORS

NH NH3

gS
NH 690V
fuse links

t-I CHARACTERISTICS

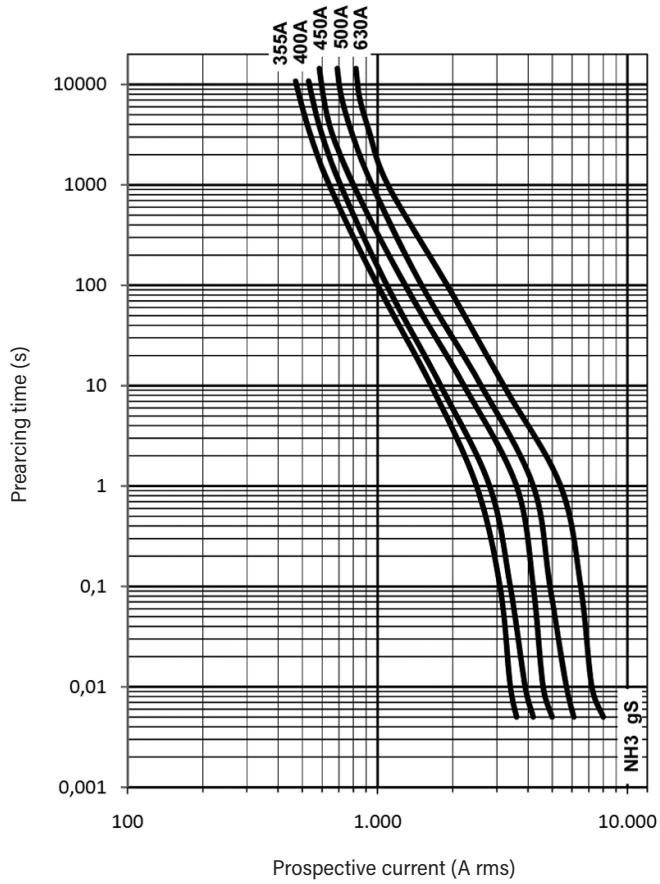

CUT-OFF CHARACTERISTICS

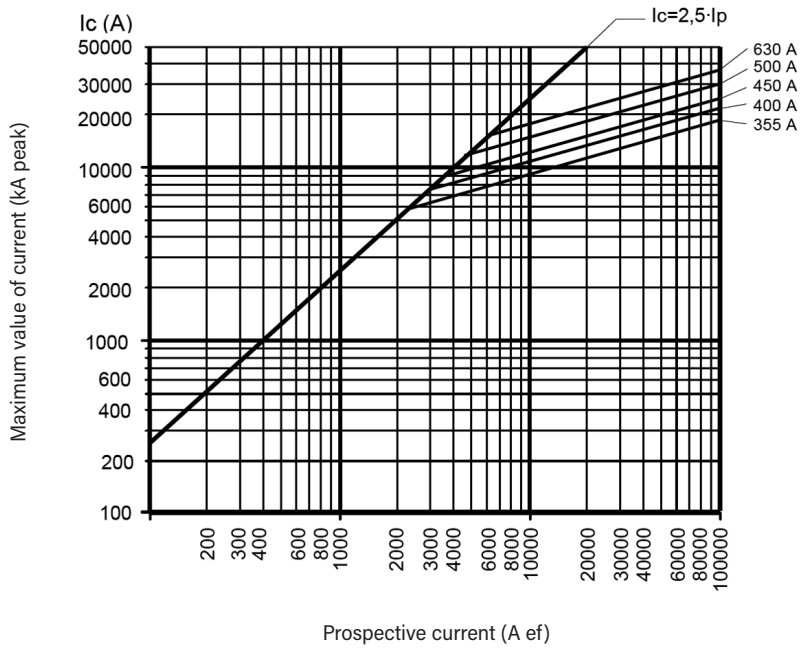

RAPIDPLUS

HIGH SPEED FUSE LINKS FOR SEMICONDUCTORS

NH NH00

gS NH 800V fuse links

RATED VOLTAGE	RATED CURRENT	BREAKING CAPACITY
800V AC	25A...100A	120kA

DIMENSIONS

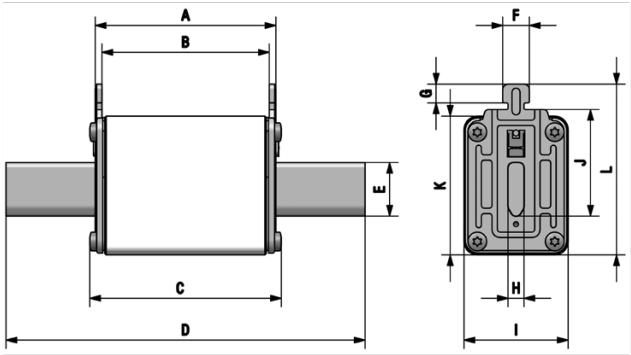

A	B	C	D	E	F	G	H	I	J	K	L
49	44	52	78,5	15	10	9,5	6	29	35	47	59

I^2t CORRECTION FACTOR (K)

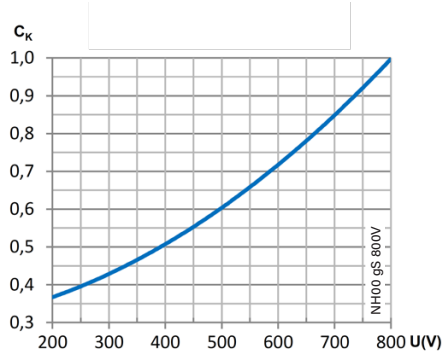

CORRECTION FACTOR FOR POWER LOSS (Cp)

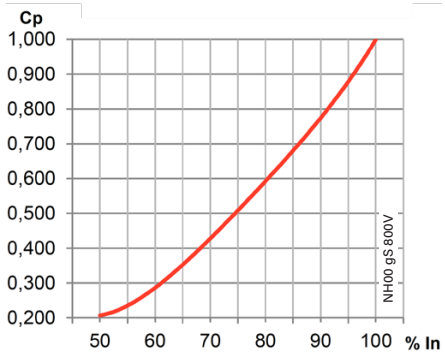

POWER DISSIPATION

I_n	I^2t PREARCING	OPERATING I^2t @800V	POWER LOSS $0.8 \cdot I_n$	POWER LOSS I_n
(A)	(A^2S)	(A^2S)	(W)	(W)
25	60	300	2,4	4,1
32	150	800	2,6	4,6
40	200	1300	3,3	5,6
50	500	2500	3,7	6,1
63	900	5000	4,2	6,8
80	1800	9800	4,8	8,3
100	3100	16200	6,8	10,9

PEAK ARC VOLTAGE (U_L)

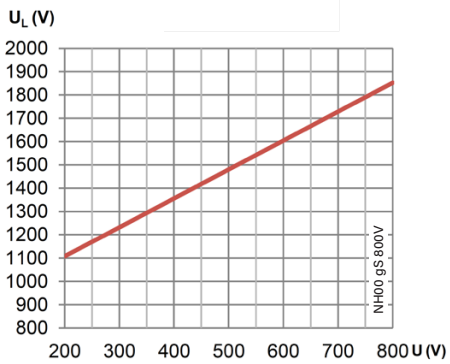

NH NH00 gS NH 800V fuse links

t-I CHARACTERISTICS

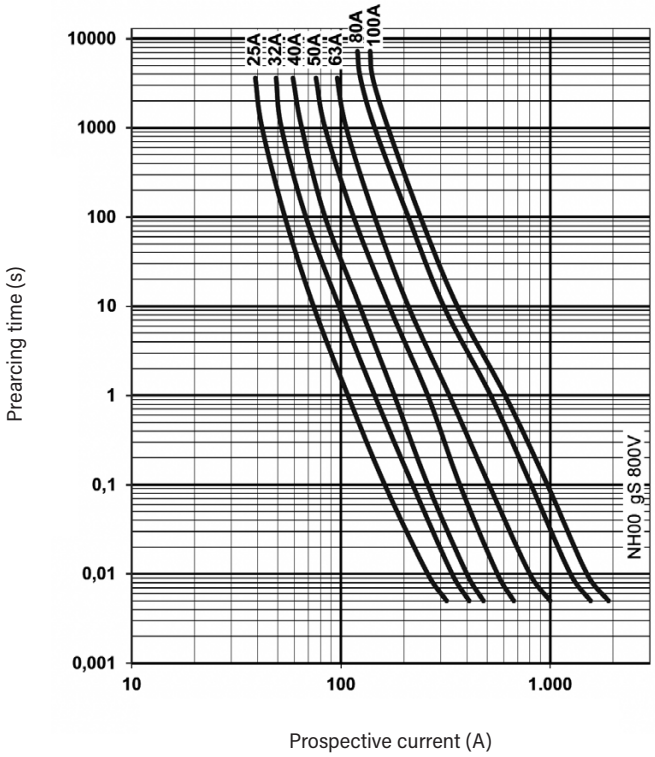

CUT-OFF CHARACTERISTICS

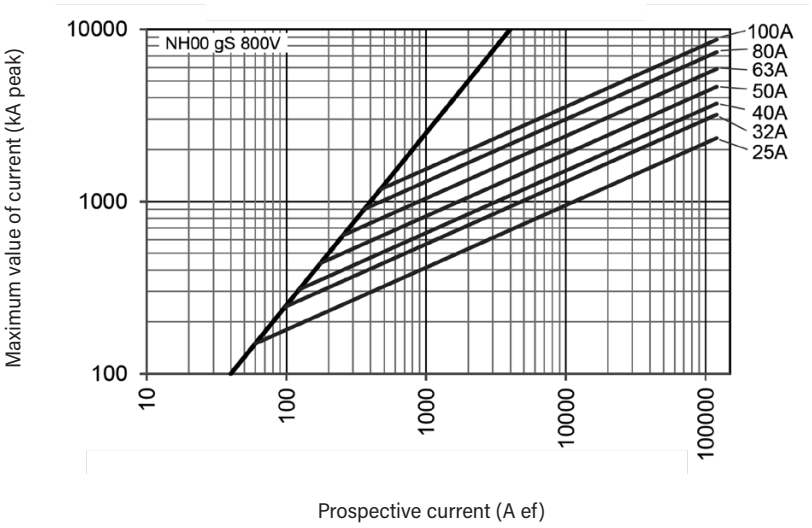

RAPIDPLUS

HIGH SPEED FUSE LINKS FOR SEMICONDUCTORS

NH NH1

gS NH 800V fuse links

RATED VOLTAGE	RATED CURRENT	BREAKING CAPACITY
800V AC	100A...200A	120kA

DIMENSIONS

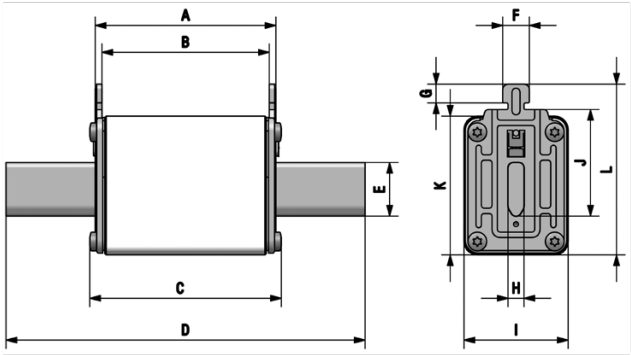

A	B	C	D	E	F	G	H	I	J	K	L
68	62	71,5	135	20	10	9,5	6	39	40	52	64

I^2t CORRECTION FACTOR (K)

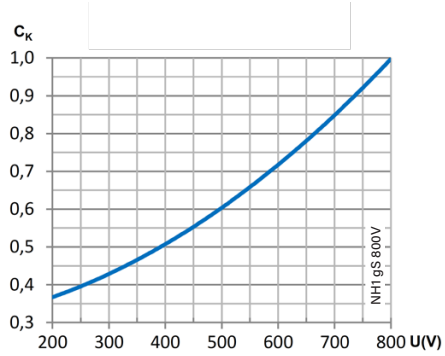

CORRECTION FACTOR FOR POWER LOSS (Cp)

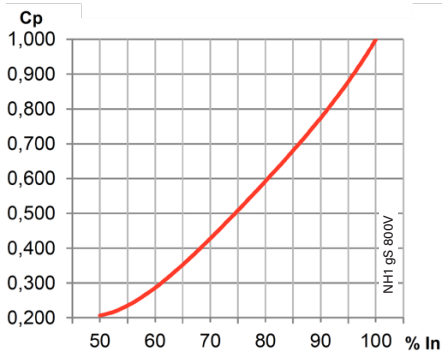

POWER DISSIPATION

I_n	I^2t PREARCING	OPERATING I^2t @800V	POWER LOSS $0.8 \cdot I_n$	POWER LOSS I_n
(A)	(A^2S)	(A^2S)	(W)	(W)
100	2300	7900	8,5	14,5
125	4600	15400	9,4	16
160	9400	31500	10,8	18,5
200	18400	61800	12	20,5

PEAK ARC VOLTAGE (U_L)

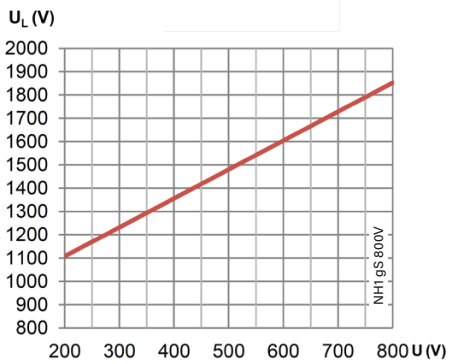

NH NH1 gS NH 800V fuse links

t-I CHARACTERISTICS

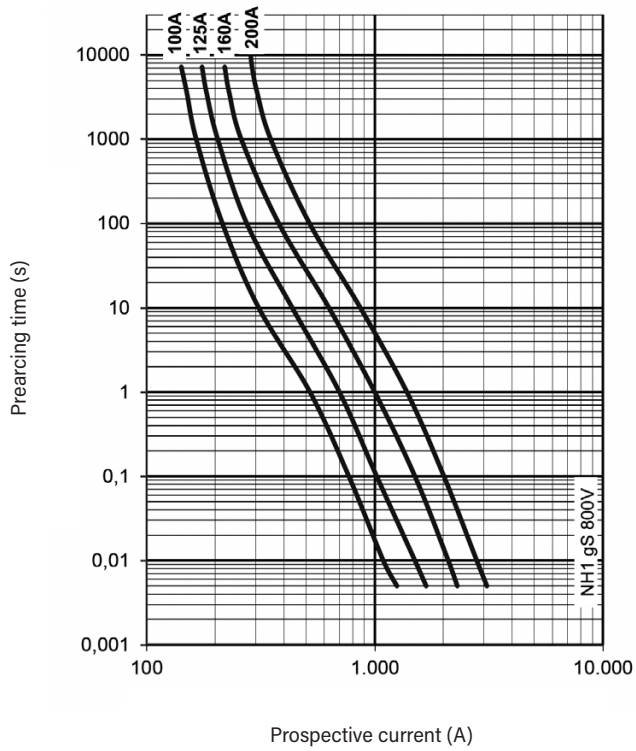

CUT-OFF CHARACTERISTICS

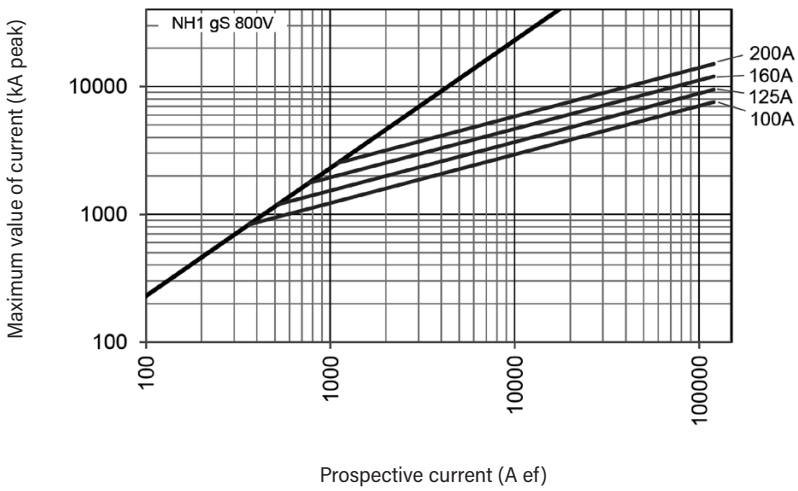

RAPIDPLUS

HIGH SPEED FUSE LINKS FOR SEMICONDUCTORS

NH NH3

gS NH 800V fuse links

RATED VOLTAGE	RATED CURRENT	BREAKING CAPACITY
800V AC	250A...400A	120kA

DIMENSIONS

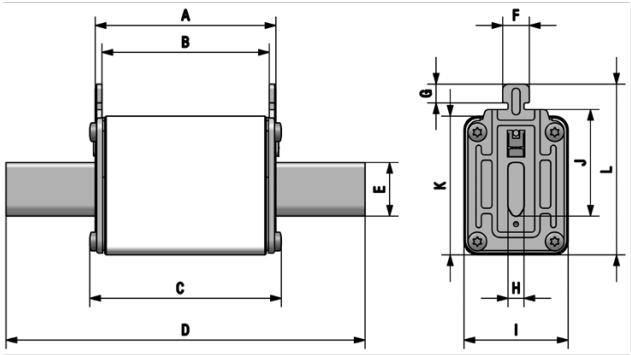

A	B	C	D	E	F	G	H	I	J	K	L
68	62	73	150	32	10	9,5	6	70	60	75	87

I^2t CORRECTION FACTOR (K)

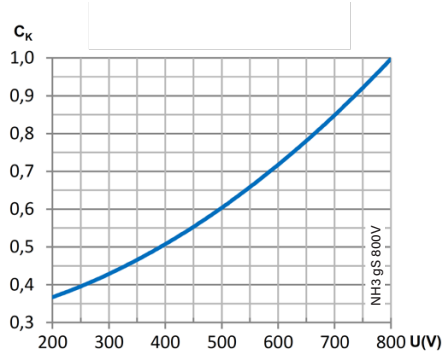

CORRECTION FACTOR FOR POWER LOSS (Cp)

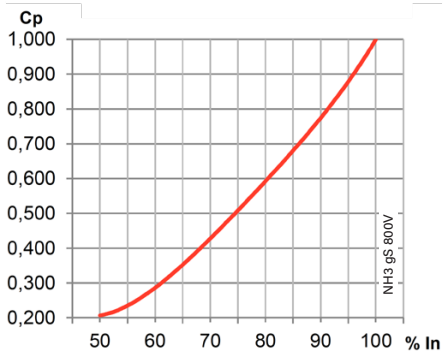

POWER DISSIPATION

I_n	I^2t PREARCING	OPERATING I^2t @800V	POWER LOSS $0.8 \cdot I_n$	POWER LOSS I_n
(A)	(A^2S)	(A^2S)	(W)	(W)
250	30300	98000	16,2	27,5
315	58200	187000	19,5	33
355	86900	279000	19,9	33,7
400	121300	390000	22,1	37,5

PEAK ARC VOLTAGE (U_L)

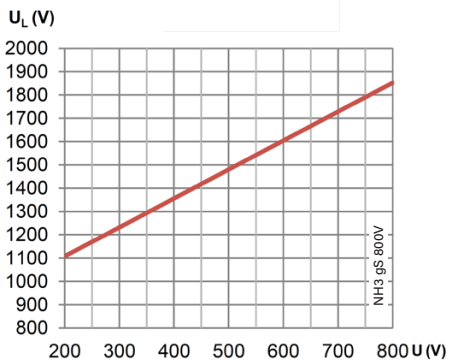

NH NH3 gS NH 800V fuse links

t-I CHARACTERISTICS

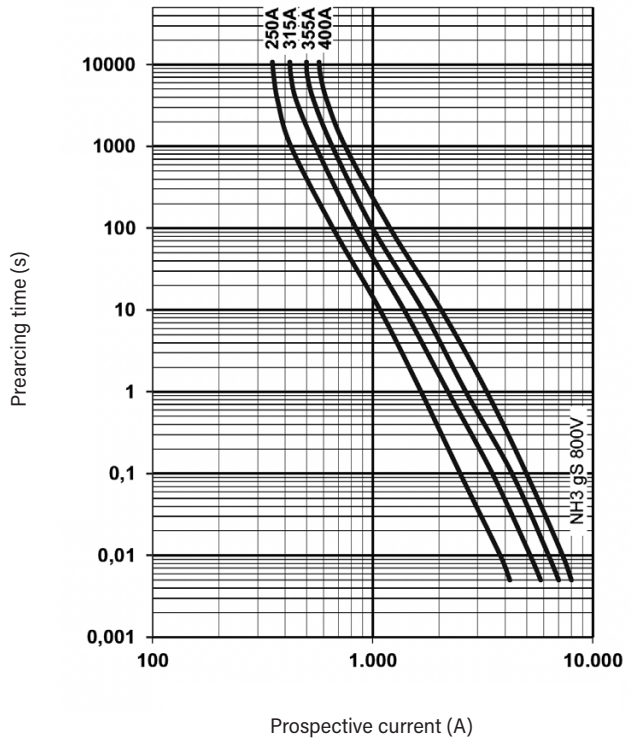

CUT-OFF CHARACTERISTICS

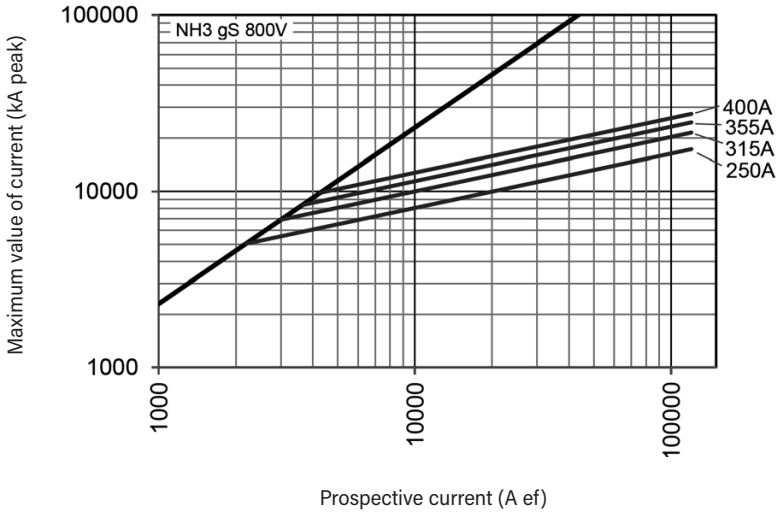

RAPIDPLUS

HIGH SPEED FUSE LINKS FOR SEMICONDUCTORS

NH NH000

aR
NH
fuse links

RATED VOLTAGE	RATED CURRENT	BREAKING CAPACITY
690V AC	16A...250A	120kA (690V AC) 30kA (440V DC)

DIMENSIONS

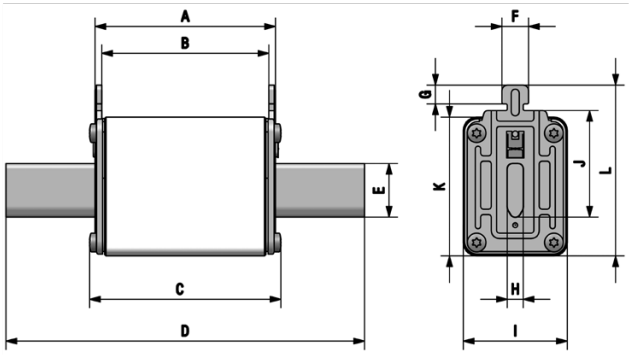

A	B	C	D	E	F	G	H	I	J	K	L
49	45	52	78,5	15	10	9,5	6	21	35	40	53

I²t CORRECTION FACTOR (K)

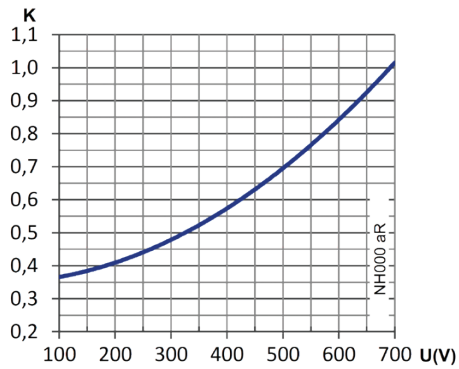

CORRECTION FACTOR FOR POWER LOSS (Cp)

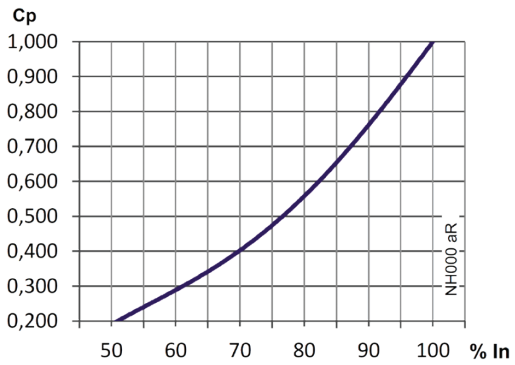

POWER DISSIPATION

I_n	I^2t PREARCING	OPERATING I^2t @690V	POWER LOSS $0.8 \cdot I_n$	POWER LOSS I_n
(A)	(A^2S)	(A^2S)	(W)	(W)
16	7	62	2,5	4,5
20	15	121	2,9	5,2
25	24	200	3,8	6,8
32	33	213	4,5	8,0
40	59	379	5,1	9,1
50	157	1.000	5,3	9,5
63	290	2.270	6,9	12
80	550	4.300	8,4	15
100	720	5.880	9,5	17
125	1.410	11.540	11	20
160	2.340	19.080	15	26
200	3.490	28.500	20	36
250	6.500	53.000	26	46

PEAK ARC VOLTAGE (U_L)

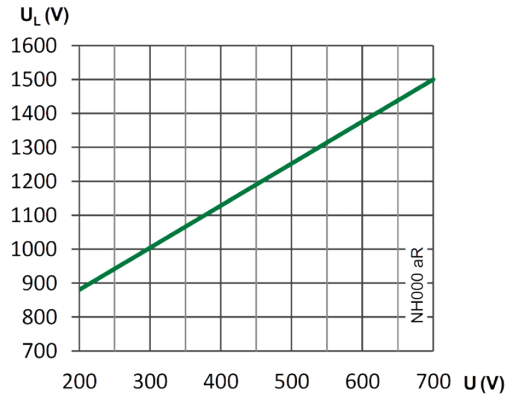

RAPIDPLUS

HIGH SPEED FUSE LINKS FOR SEMICONDUCTORS

NH NH000 aR NH fuse links

t-I CHARACTERISTICS

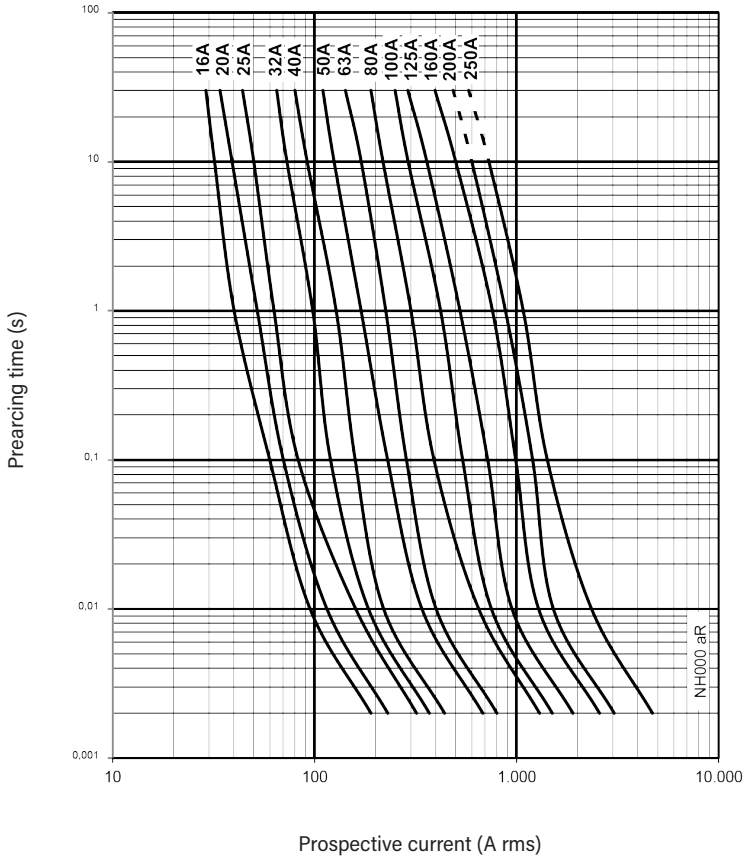

CUT-OFF CHARACTERISTICS

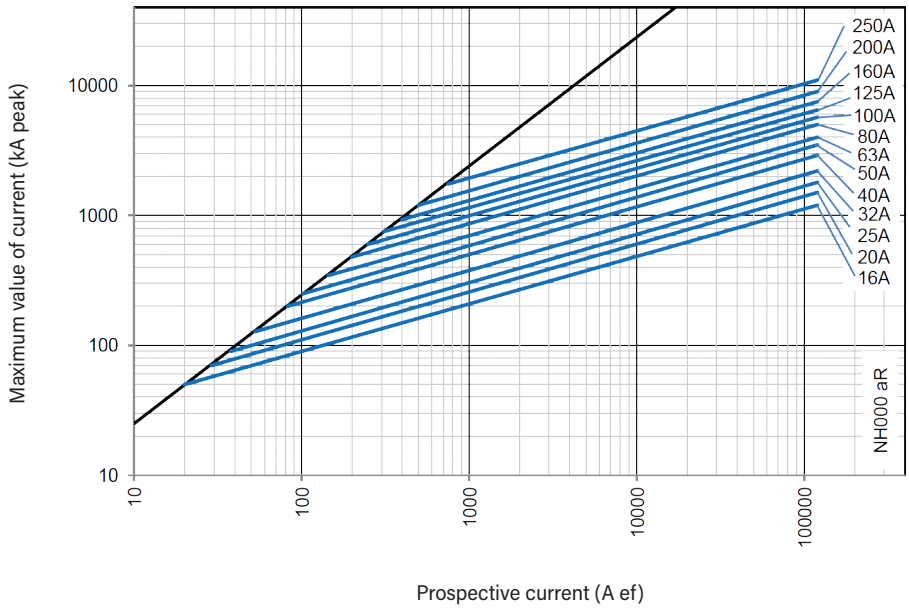

RAPIDPLUS

HIGH SPEED FUSE LINKS FOR SEMICONDUCTORS

NH NH1 aR NH fuse links

RATED VOLTAGE	RATED CURRENT	BREAKING CAPACITY
690V AC	40A...400A	120kA (690V AC)
		30kA (550V DC)

DIMENSIONS

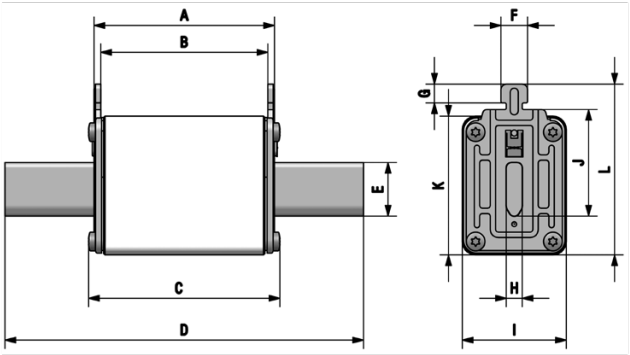

A	B	C	D	E	F	G	H	I	J	K	L
68	62	71,5	135	20	10	9,5	6	39	40	52	64

I²t CORRECTION FACTOR (K)

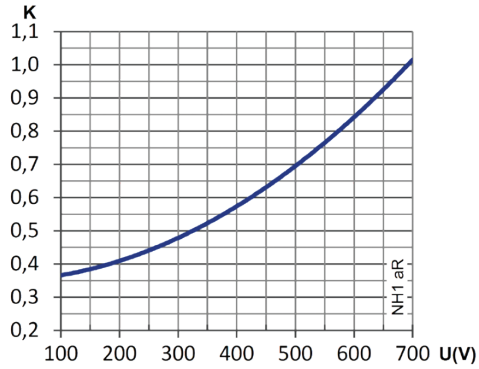

CORRECTION FACTOR FOR POWER LOSS (Cp)

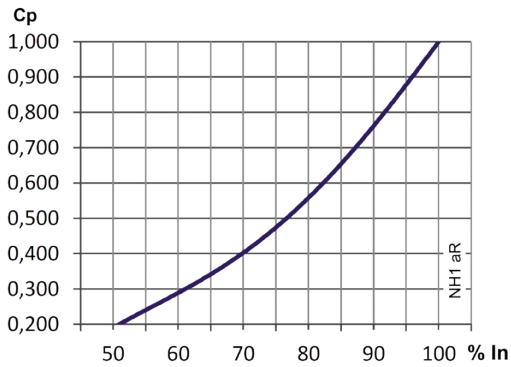

POWER DISSIPATION

I_n	I^2t PREARCING	OPERATING I^2t @690V	POWER LOSS $0.8 \cdot I_n$	POWER LOSS I_n
(A)	(A^2S)	(A^2S)	(W)	(W)
40	55	320	8,1	14
50	97	570	9,6	17
63	220	1.300	11	19
80	370	2.300	13	23
100	570	3.590	18	32
125	980	6.080	24	44
160	1.710	10.560	25	45
200	3.040	18.770	33	59
250	5.400	33.380	41	73
315	10.220	63.110	43	77
350	12.160	75.100	45	80
400	23.000	142.000	52	93

PEAK ARC VOLTAGE (U_L)

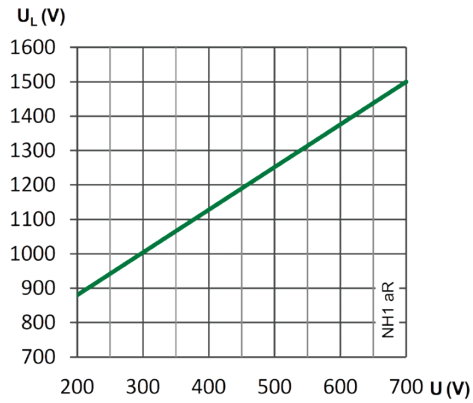

RAPIDPLUS

HIGH SPEED FUSE LINKS FOR SEMICONDUCTORS

NH NH1 aR NH fuse links

t-I CHARACTERISTICS

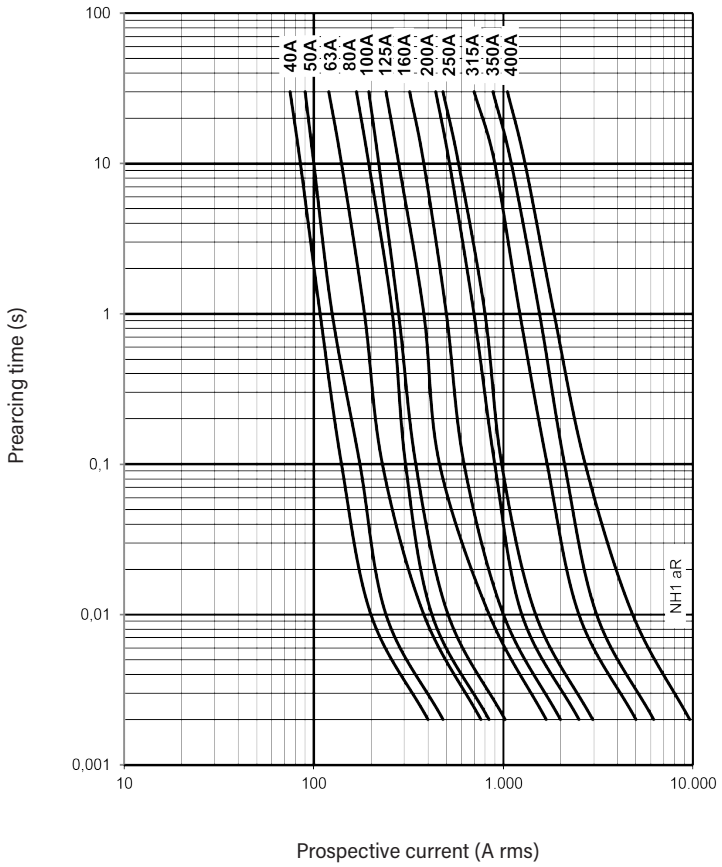

CUT-OFF CHARACTERISTICS

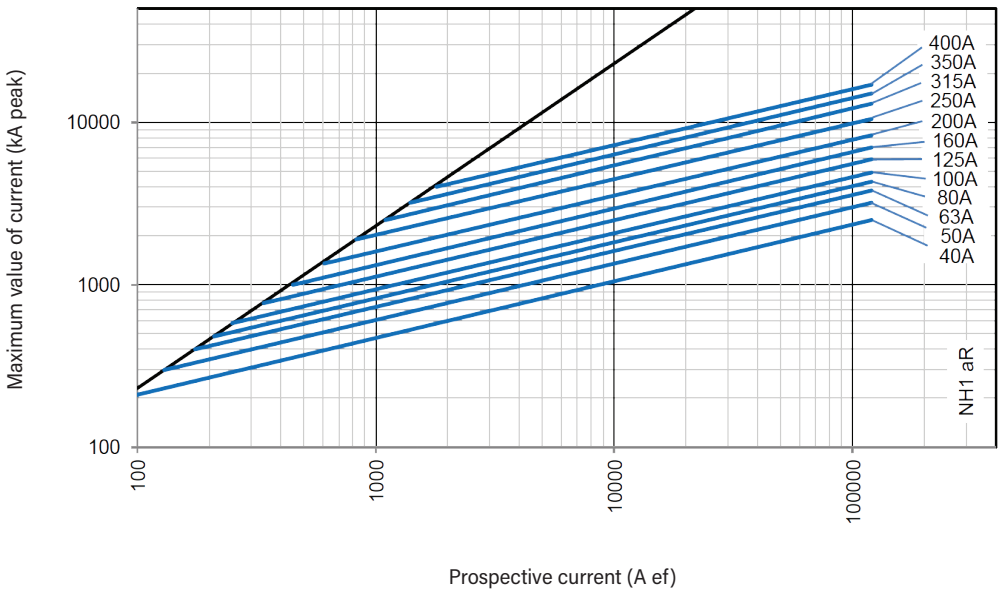

RAPIDPLUS

HIGH SPEED FUSE LINKS FOR SEMICONDUCTORS

NH NH2 aR NH fuse links

RATED VOLTAGE	RATED CURRENT	BREAKING CAPACITY
690V AC	200A...700A	120kA (690V AC)
		30kA (550V DC)

DIMENSIONS

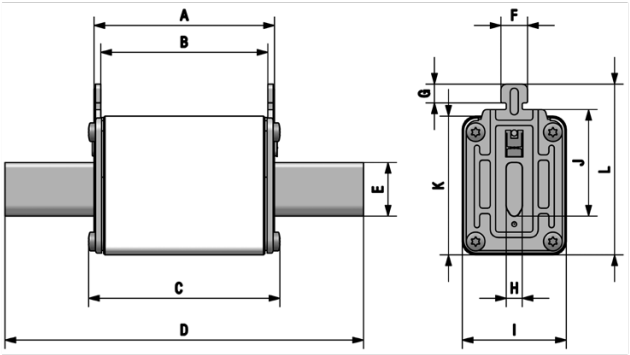

A	B	C	D	E	F	G	H	I	J	K	L
68	62	71,5	150	25	10	9,5	6	53	48	60	72

I²t CORRECTION FACTOR (K)

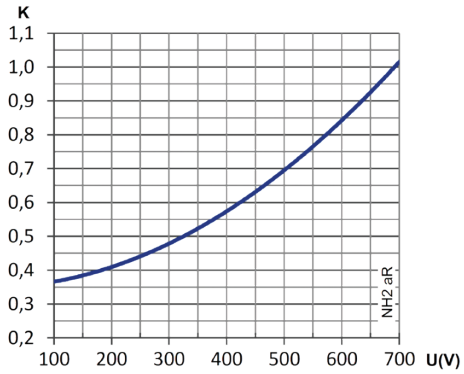

CORRECTION FACTOR FOR POWER LOSS (Cp)

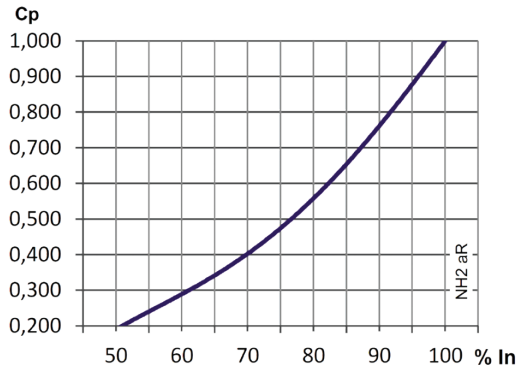

POWER DISSIPATION

I_n	I^2t PREARCING	OPERATING I^2t @690V	POWER LOSS $0.8 \cdot I_n$	POWER LOSS I_n
(A)	(A^2S)	(A^2S)	(W)	(W)
200	1.550	9.430	53	95
250	3.250	19.670	56	100
315	6.230	37.720	57	102
350	9.300	56.340	58	104
400	13.000	78.700	72	129
450	17.000	102.000	77	137
500	24.500	147.000	83	148
550	36.000	216.000	85	152
630	47.220	283.330	95	170
700	68.000	408.000	99	178

PEAK ARC VOLTAGE (U_L)

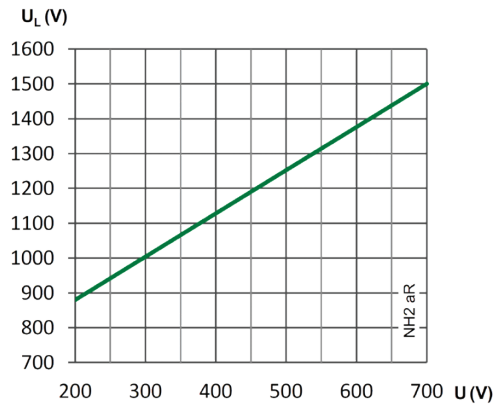

NH NH2 aR NH fuse links

t-I CHARACTERISTICS

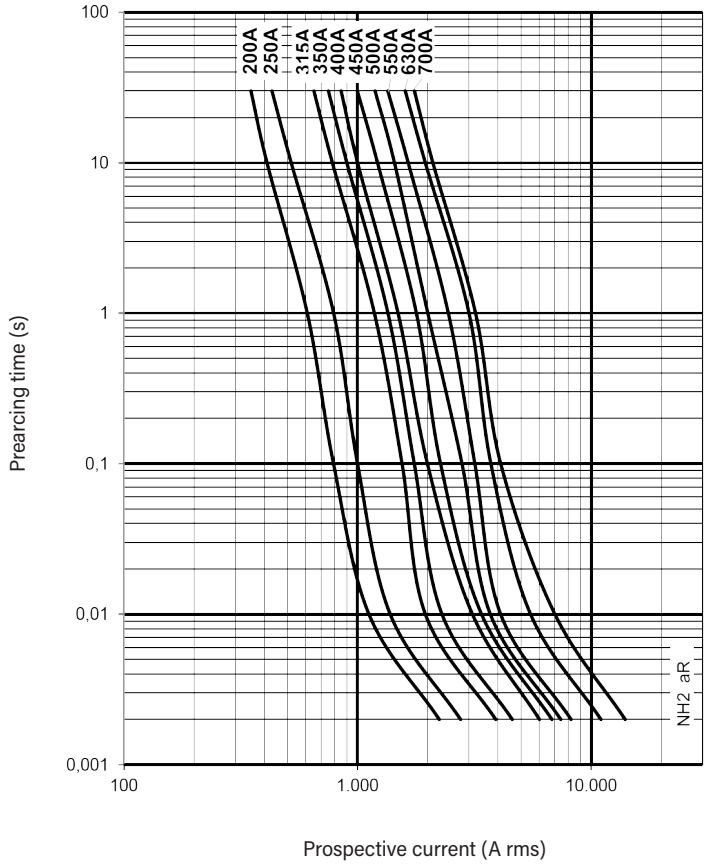

CUT-OFF CHARACTERISTICS

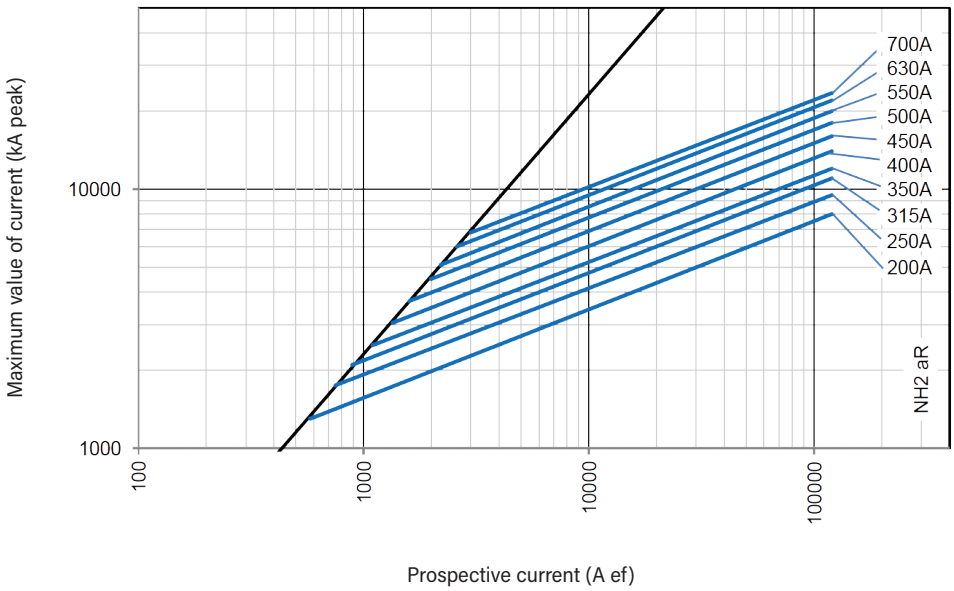

RAPIDPLUS

HIGH SPEED FUSE LINKS FOR SEMICONDUCTORS

NH NH3 aR NH fuse links

RATED VOLTAGE	RATED CURRENT	BREAKING CAPACITY
690V AC	500A...1000A	120kA (690V AC)
		30kA (550V DC)

DIMENSIONS

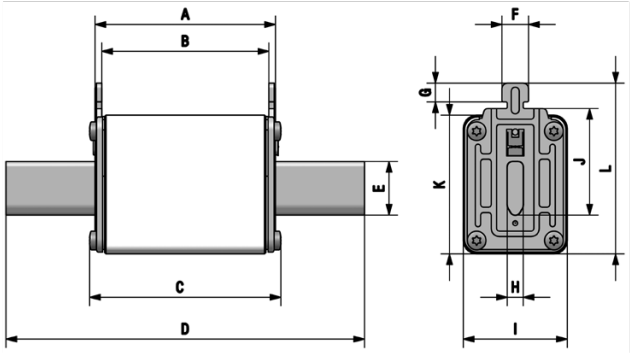

A	B	C	D	E	F	G	H	I	J	K	L
68	62	73	150	32	10	9,5	6	70	60	75	87

I^2t CORRECTION FACTOR (K)

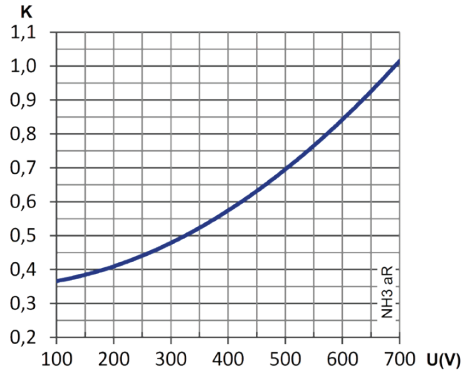

CORRECTION FACTOR FOR POWER LOSS (Cp)

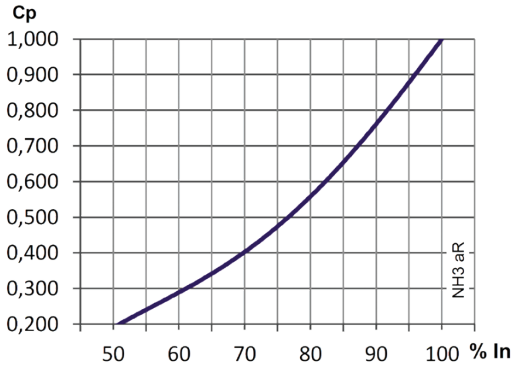

POWER DISSIPATION

I_n	I^2t PREARCING	OPERATING I^2t @690V	POWER LOSS $0.8 \cdot I_n$	POWER LOSS I_n
(A)	(A^2S)	(A^2S)	(W)	(W)
500	22.160	109.000	76	136
550	32.100	158.060	81	145
630	45.500	220.000	89	159
700	65.520	322.200	103	184
800	97.870	481.310	107	191
900	126.380	621.520	121	216
1000	182.000	895.000	150	268

PEAK ARC VOLTAGE (U_L)

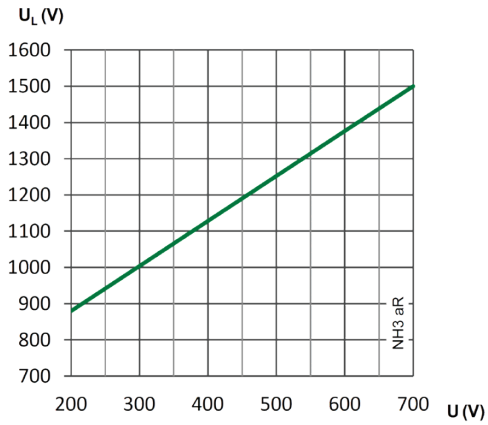

NH NH3 aR NH fuse links

t-I CHARACTERISTICS

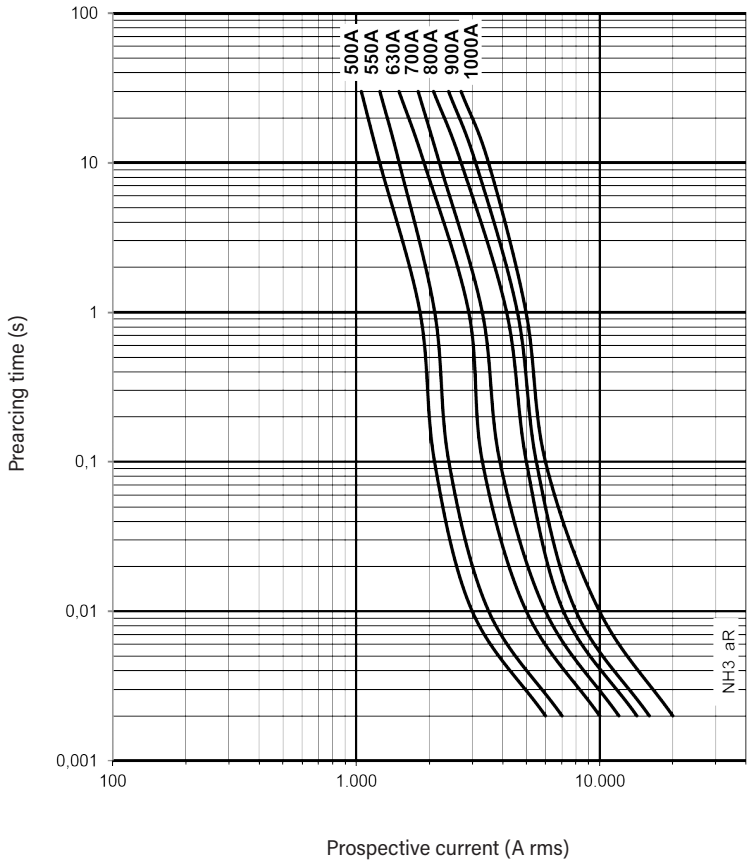

CUT-OFF CHARACTERISTICS

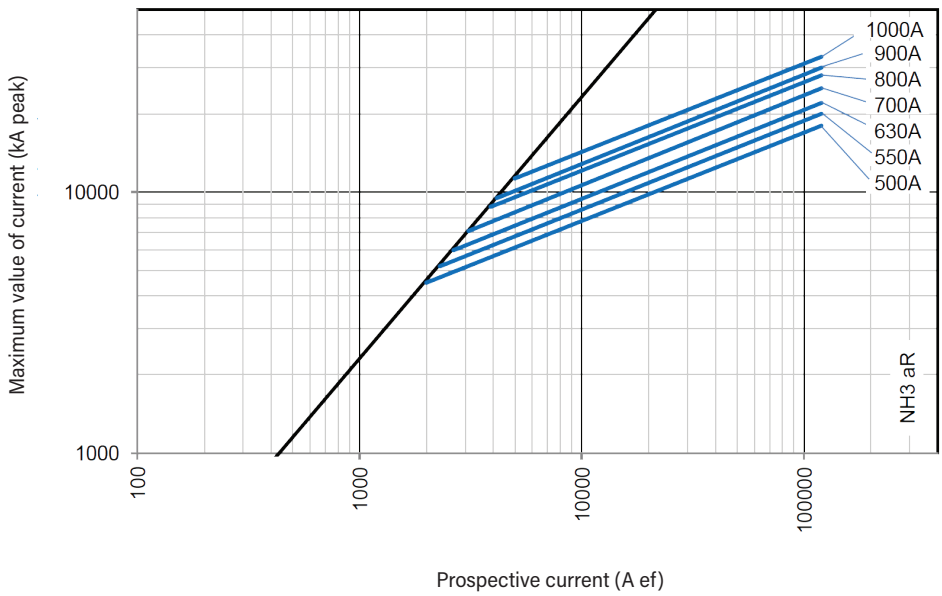

RAPIDPLUS

HIGH SPEED FUSE LINKS FOR SEMICONDUCTORS

SQB SQB1 FLUSH END CONTACT

SQB square body fuse links

RATED VOLTAGE	RATED CURRENT	BREAKING CAPACITY
690V AC	80A...800A	120kA

DIMENSIONS

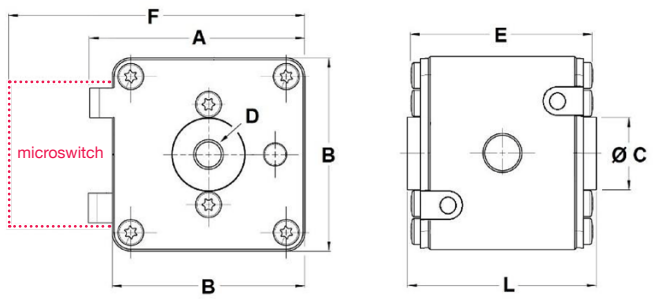

A	B	C	D THREAD	D DEPTH	E	F	L
58	52	19,6	M8	9	49	87	51

I²t CORRECTION FACTOR (K)

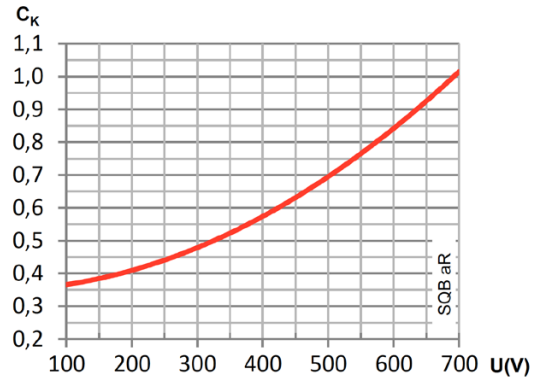

CORRECTION FACTOR FOR POWER LOSS (Cp)

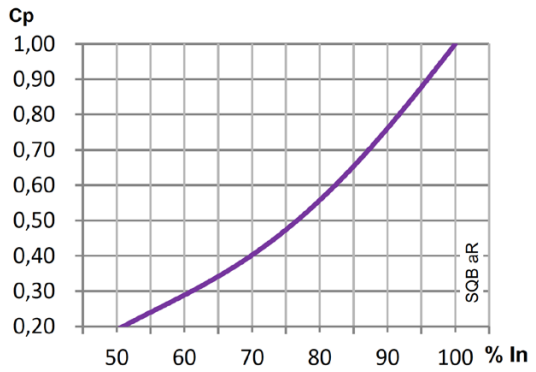

POWER DISSIPATION

I_n (A)	POWER LOSS I_n (W)	PREARCING I^2t (A^2S)	OPERATING I^2t @690V (A^2S)
80	15	350	2570
100	20	550	4000
125	30	795	5750
160	33	1400	10250
200	39	2675	19450
250	43	4700	31000
315	51	8350	55200
350	54	12000	79500
400	56	18800	124000
450	60	25600	169200
500	65	28200	209000
550	71	35700	264900
630	76	53400	395800
700	81	76900	570000
800	90	98500	812000

PEAK ARC VOLTAGE (U_L)

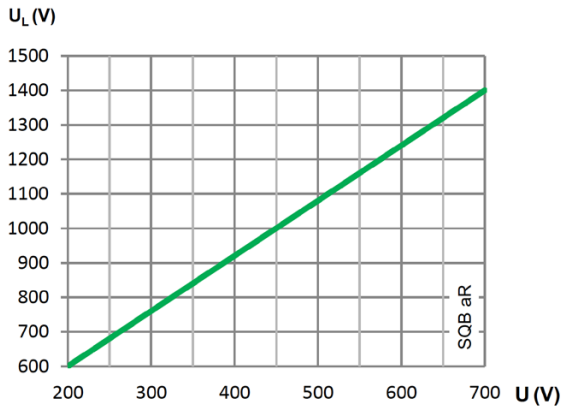

df Electric

RAPIDPLUS

HIGH SPEED FUSE LINKS FOR SEMICONDUCTORS

SQB SQB1 BLADE CONTACT 80mm

SQB square body fuse links

RATED VOLTAGE	RATED CURRENT	BREAKING CAPACITY
690V AC	80A...800A	120kA

DIMENSIONS

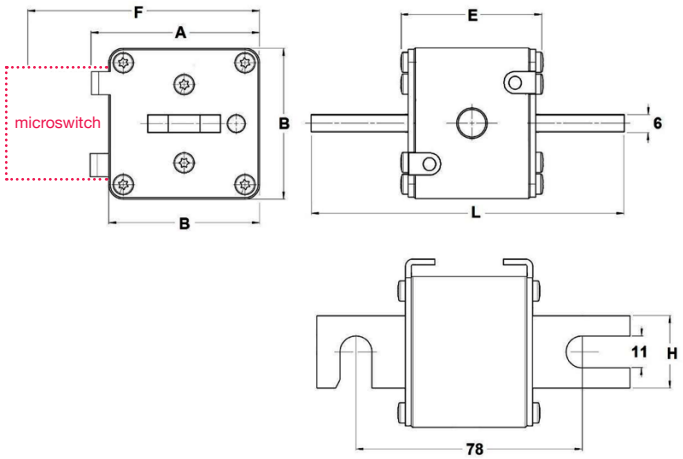

A	B	E	F	H	L
58	52	49	87	25	108

POWER DISSIPATION

I_n (A)	POWER LOSS I_n (W)	PREARCING I^2t (A^2S)	OPERATING I^2t (A^2S)
80	15	350	2570
100	20	550	4000
125	30	795	5750
160	33	1400	10250
200	39	2675	19450
250	43	4700	31000
315	51	8350	55200
350	54	12000	79500
400	56	18800	124000
450	60	25600	169200
500	65	28200	209000
550	71	35700	264900
630	76	53400	395800
700	81	76900	570000
800	90	98500	812000

I^2t CORRECTION FACTOR (K)

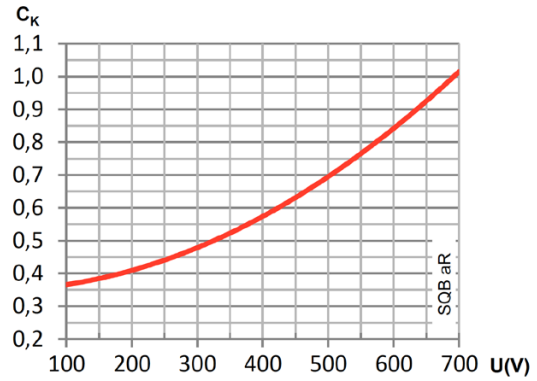

CORRECTION FACTOR FOR POWER LOSS (Cp)

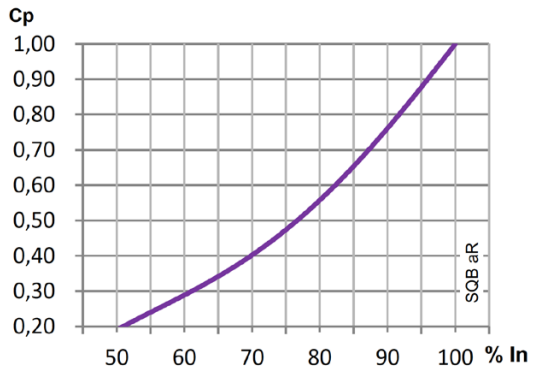

PEAK ARC VOLTAGE (U_L)

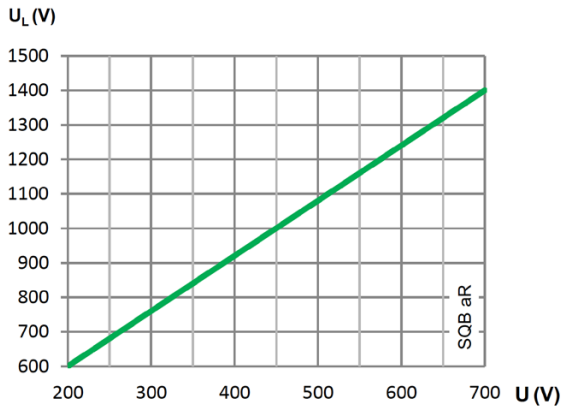

RAPIDPLUS

HIGH SPEED FUSE LINKS FOR SEMICONDUCTORS

SQB | SQB1 | BLADE CONTACT 110mm

SQB square body fuse links

RATED VOLTAGE	RATED CURRENT	BREAKING CAPACITY
690V AC	80A...800A	120kA

DIMENSIONS

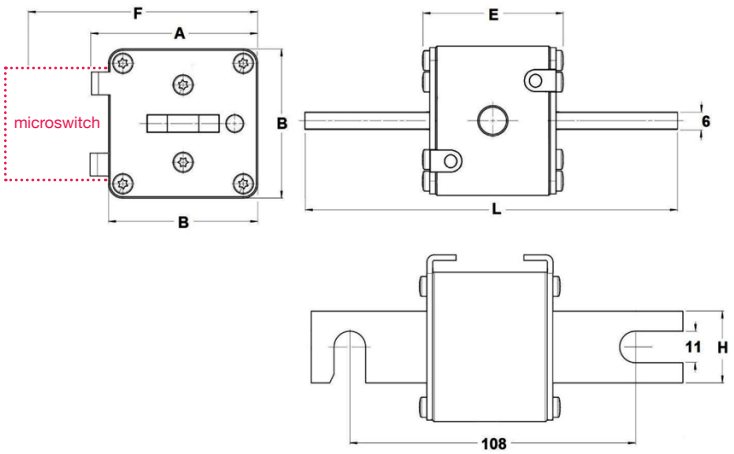

A	B	E	F	H	L
58	52	49	87	25	138

POWER DISSIPATION

I_n	POWER LOSS I_n	PREARCING I^2t	OPERATING I^2t @690V
(A)	(W)	(A^2S)	(A^2S)
80	15	350	2570
100	20	550	4000
125	30	795	5750
160	33	1400	10250
200	39	2675	19450
250	43	4700	31000
315	51	8350	55200
350	54	12000	79500
400	56	18800	124000
450	60	25600	169200
500	65	28200	209000
550	71	35700	264900
630	76	53400	395800
700	81	76900	570000
800	90	98500	812000

I^2t CORRECTION FACTOR (K)

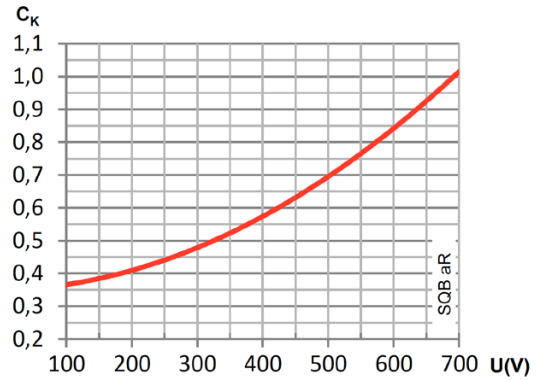

CORRECTION FACTOR FOR POWER LOSS (Cp)

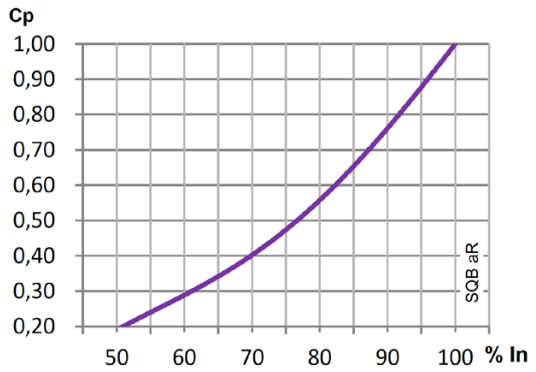

PEAK ARC VOLTAGE (U_L)

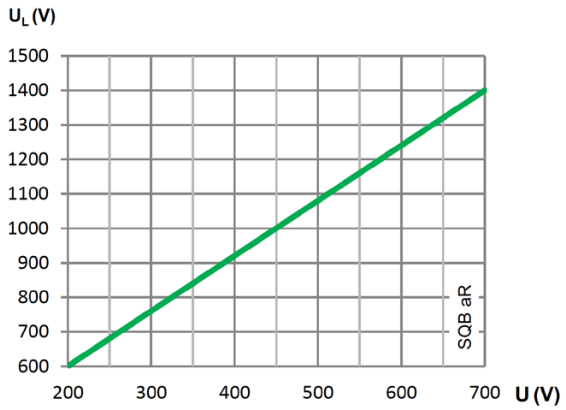

RAPIDPLUS

HIGH SPEED FUSE LINKS FOR SEMICONDUCTORS

SQB | SQB1 | FLUSH END CONTACT | BLADE CONTACT 80mm | BLADE CONTACT 110mm

t-I CHARACTERISTICS

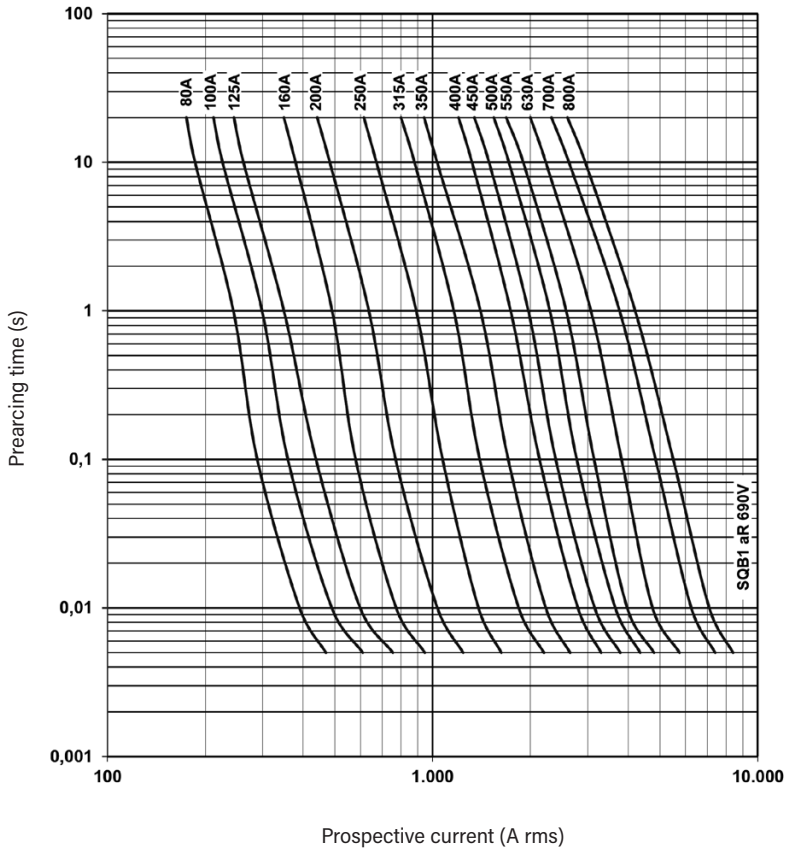

CUT-OFF CHARACTERISTICS

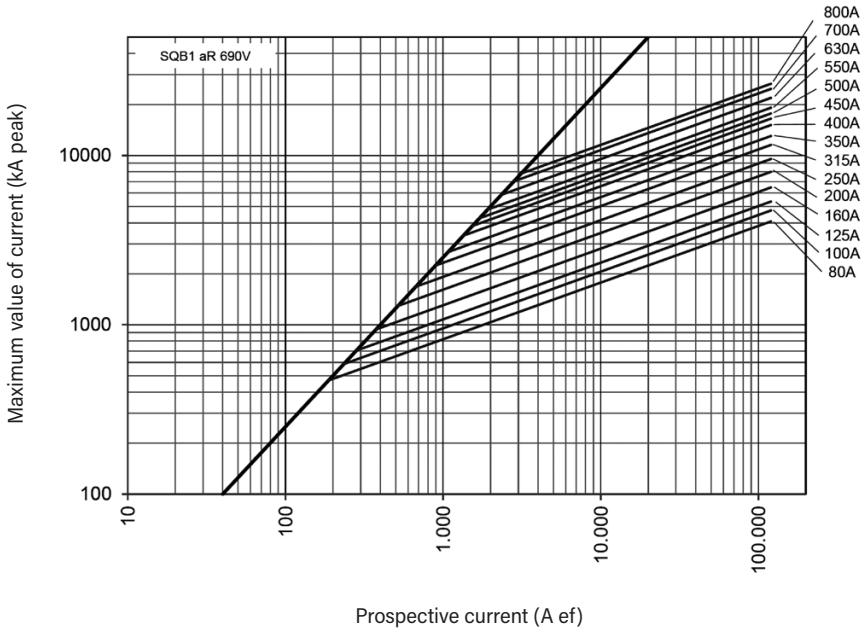

RAPIDPLUS

HIGH SPEED FUSE LINKS FOR SEMICONDUCTORS

SQB SQB3 FLUSH END CONTACT

SQB square body fuse links

RATED VOLTAGE	RATED CURRENT	BREAKING CAPACITY
690V AC	500A...1400A	120kA

DIMENSIONS

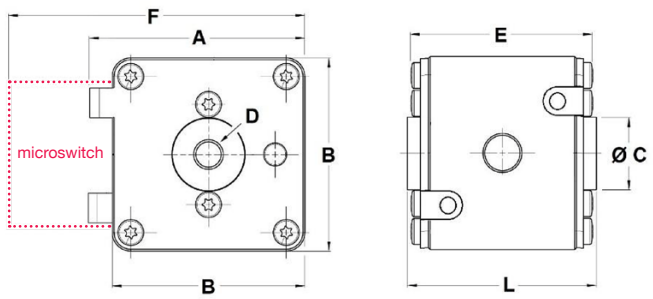

A	B	C	D THREAD	D DEPTH	E	F	L
81	73,5	29,5	M12	12	50,5	109	52

I²t CORRECTION FACTOR (K)

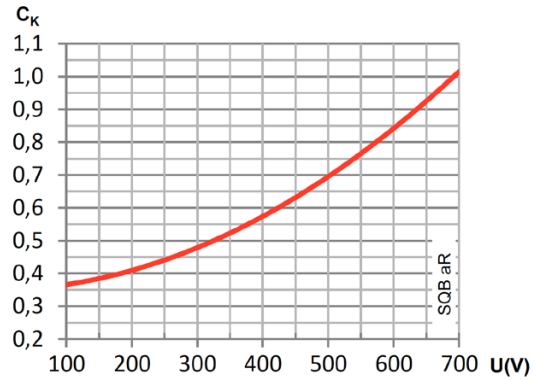

CORRECTION FACTOR FOR POWER LOSS (Cp)

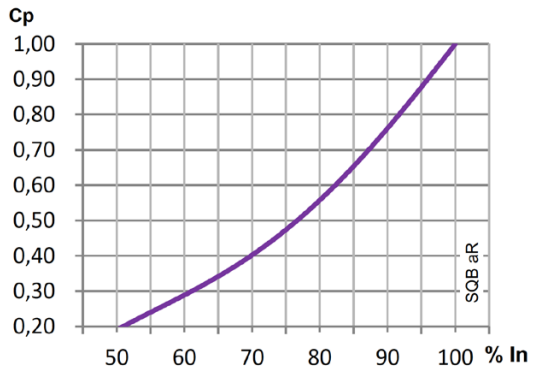

POWER DISSIPATION

I_n (A)	POWER LOSS I_n (W)	PREARCING I^2t (A^2S)	OPERATING I^2t @690V (A^2S)
500	84	18700	137000
550	85	24900	182900
630	98	36500	269000
700	100	51500	379000
800	104	82500	600000
900	111	108000	790000
1000	117	153500	1125000
1100	125	196000	1400000
1250	133	282000	2050000
1400	146	383000	2800000

PEAK ARC VOLTAGE (U_L)

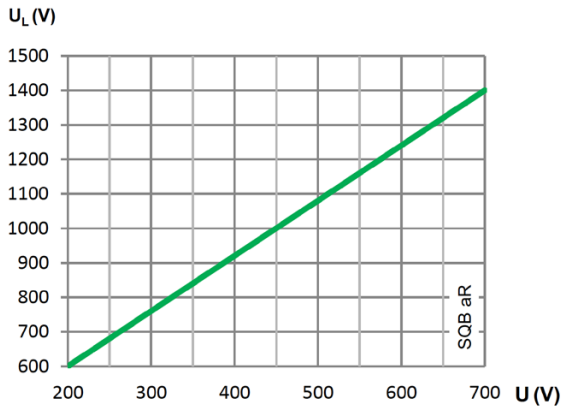

RAPIDPLUS

HIGH SPEED FUSE LINKS FOR SEMICONDUCTORS

SQB | SQB3 | BLADE CONTACT 80mm

SQB square body fuse links

RATED VOLTAGE	RATED CURRENT	BREAKING CAPACITY
690V AC	500A...1400A	120kA

DIMENSIONS

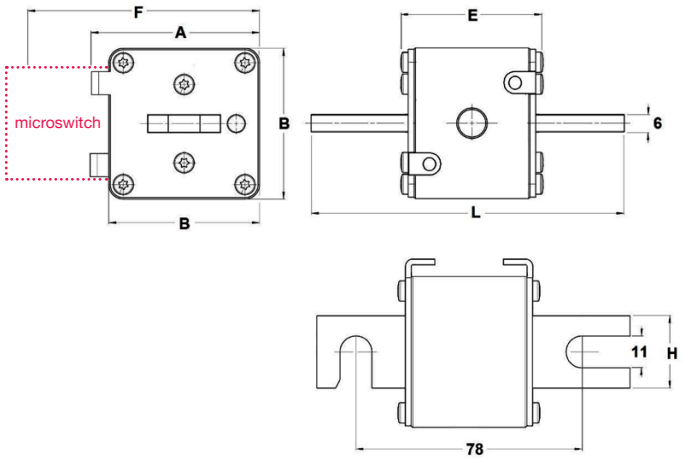

A	B	E	F	H	L
81	73,5	50,5	109	30	108,5

POWER DISSIPATION

I_n	POWER LOSS I_n	PREARCING I^2t	OPERATING I^2t
(A)	(W)	(A^2S)	(A^2S)
500	90	18700	137000
550	93	24900	182900
630	103	36500	269000
700	108	51500	379000
800	115	82500	600000
900	123	108000	790000
1000	129	153500	1125000
1100	142	196000	1400000
1250	155	282000	2050000
1400	177	383000	2800000

I^2t CORRECTION FACTOR (K)

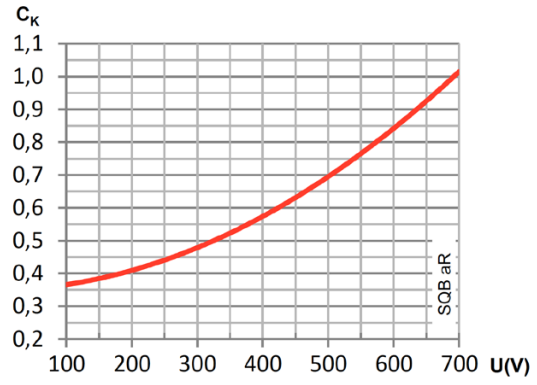

CORRECTION FACTOR FOR POWER LOSS (Cp)

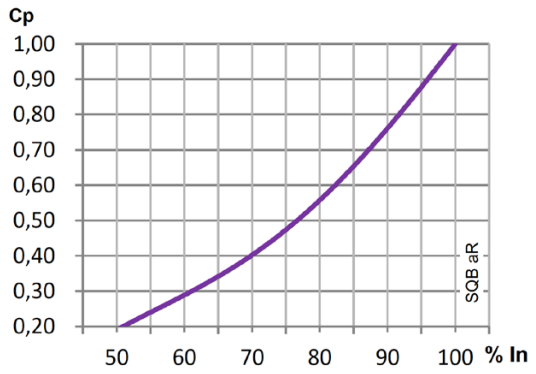

PEAK ARC VOLTAGE (U_L)

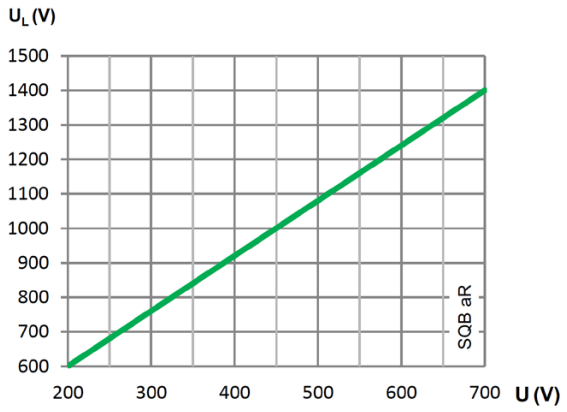

df Electric

RAPIDPLUS

HIGH SPEED FUSE LINKS FOR SEMICONDUCTORS

SQB SQB3 BLADE CONTACT 110mm

SQB square body fuse links

RATED VOLTAGE	RATED CURRENT	BREAKING CAPACITY
690V AC	500A...1400A	120kA

DIMENSIONS

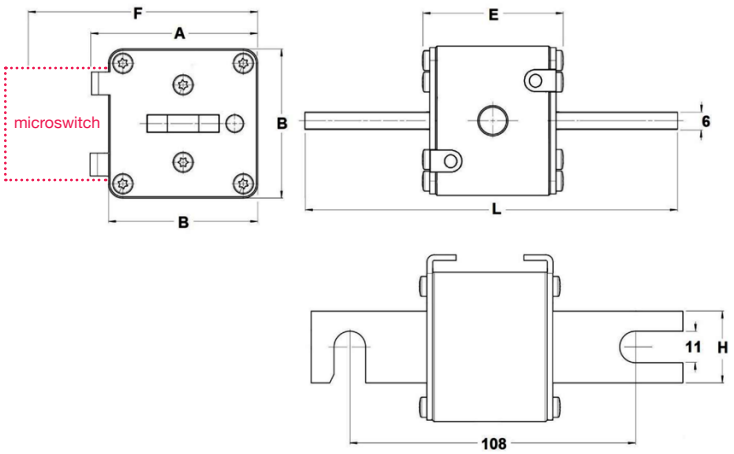

A	B	E	F	H	L
81	73,5	50,5	109	30	138,5

I^2t CORRECTION FACTOR (K)

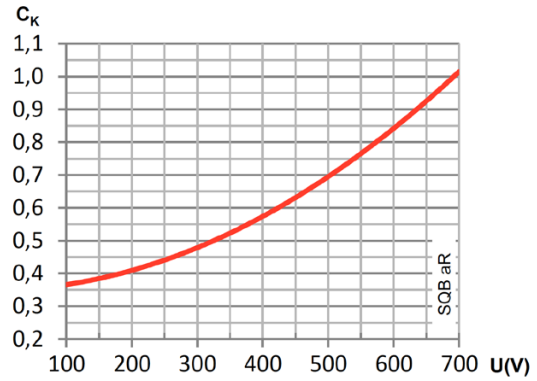

CORRECTION FACTOR FOR POWER LOSS (Cp)

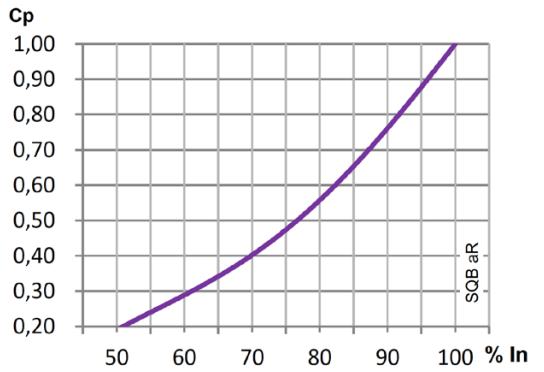

POWER DISSIPATION

I_n	POWER LOSS I_n	PREARCING I^2t	OPERATING I^2t @690V
(A)	(W)	(A^2S)	(A^2S)
500	90	18700	137000
550	93	24900	182900
630	103	36500	269000
700	108	51500	379000
800	115	82500	600000
900	123	108000	790000
1000	129	153500	1125000
1100	142	196000	1400000
1250	155	282000	2050000
1400	177	383000	2800000

PEAK ARC VOLTAGE (U_L)

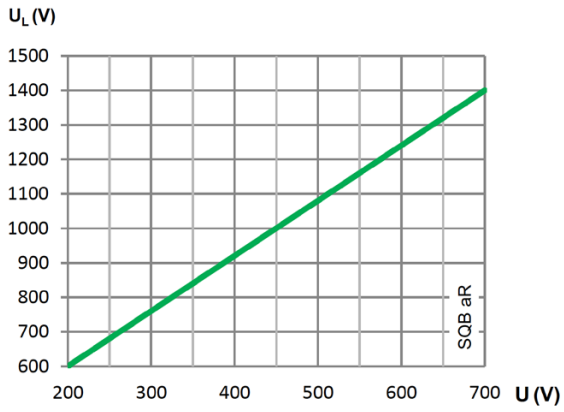

RAPIDPLUS

HIGH SPEED FUSE LINKS FOR SEMICONDUCTORS

SQB | SQB3 | FLUSH END CONTACT | BLADE CONTACT 80mm | BLADE CONTACT 110mm

t-I CHARACTERISTICS

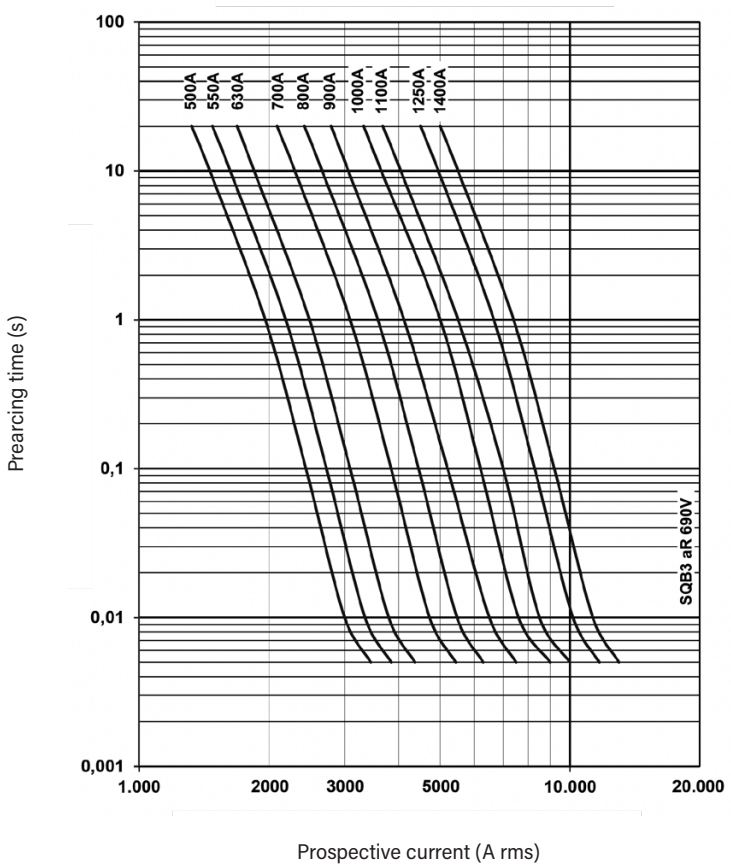

CUT-OFF CHARACTERISTICS

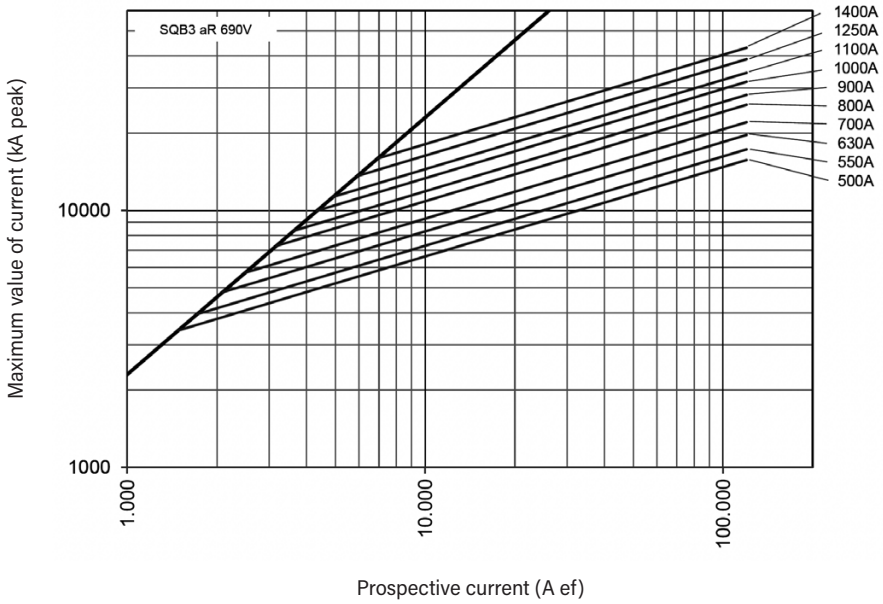

RAPIDPLUS

HIGH SPEED FUSE LINKS FOR SEMICONDUCTORS

CYL | aR | gR CYLINDRICAL fuse links

USE OF SEMICONDUCTOR FUSE LINKS RAPIDPLUS® IN PMX MODULAR FUSE HOLDERS

The modular fuse holders for cylindrical fuses have a rated power acceptance according to the maximum power dissipations allowed for the general use fuse links (gG) and back up fuse links.

These maximum values allowed for the fuse links (gG/aM) are regulated by standards (IEC/EN60269-2). In the same way, this standards specify the minimum power acceptance for the fuse holders. This power acceptance is the power dissipated by the fuse links (converted in heat) that the fuse holder can accept with an acceptable increase of the temperature (values also regulated by standards).

The fuse links for protection of semiconductors RAPIDPLUS have a rated power dissipation (or power loss) higher than the gG or aM types, and for this reason there are some limitations for the application of these fuses in closed modular fuse holders.

It is necessary to check that the fuse links have a power diissipation not higher than the maximum value admissible of the fuse holder indicated by the manufacturer.

When it is no possible to use modular fuse holders the solution is the use of an open fuse base where the heat can be appropriately dissipated.

In the following table are indicated the maximum values of power acceptance for DF ELECTRIC fuse holders. These limits should never be exceeded:

PMX | PMX CYLINDRICAL fuse holders

	10x38	14x51	22x58
RATED POWER ACCEPTANCE IEC/EN60269-2	3W	5W	9,5W
MAX. POWER ACCEPTANCE DF ELECTRIC FUSE HOLDERS	4W	6W	12W

df Electric

RAPIDPLUS

HIGH SPEED FUSE LINKS FOR SEMICONDUCTORS

NH

aR
NH
fuse links

FUSE LOAD CONSTANT C_L

Due to the high power dissipation of NH aR fuse-links, it is necessary to apply a derating factor that determines the maximum allowable continous current when these fuses are installed in an NH base or in a fuse-switch-disconnector.

$$I_{MAX.} = I_N \times C_L$$

NH000

I_n (A)	OPEN TYPE FUSE BASES	FUSE SWITCH DISCONNECTORS
16	1	1
20	1	1
25	1	1
32	1	1
40	1	1
50	1	1
63	1	1
80	1	0.95
100	1	0,90
125	0,95	0,85
160	0,90	0,75
200	0,80	0,70
250	0,80	0,60

NH1

40	1	0.95
50	0,90	0,85
63	0,90	0,85
80	0,90	0,85
100	0,90	0,85
125	0,75	0,70
160	0,75	0,70
200	0,75	0,70
250	0,75	0,70
315	0,75	0,65
350	0,70	0,65
400	0,70	0,60

NH2

I_n (A)	OPEN TYPE FUSE BASES	FUSE SWITCH DISCONNECTORS
200	0,70	0,65
250	0,70	0,65
315	0,70	0,65
350	0,70	0,65
400	0,70	0,65
450	0,65	0,60
500	0,65	0,60
550	0,65	0,60
630	0,65	0,55
700	0,65	0,55

NH3

500	0,70	0,65
550	0,70	0,65
630	0,70	0,65
700	0,70	0,60
800	0,70	0,60
900	0,65	0,55
1000	0,60	0,50

PROTECTING THE WORLD

HEAD OFFICE AND FACTORY
SILICI, 67-69
08940 CORNELLA DE LLOBREGAT
BARCELONA · SPAIN
Tel. +34 93 377 85 85
Fax +34 93 377 82 82

INTERNATIONAL SALES
Tel. +34 93 475 08 64
Fax +34 93 480 07 75
export@dfelectric.es

NATIONAL SALES
Tel. 93 475 08 64
Fax 93 480 07 76
comercial@dfelectric.es

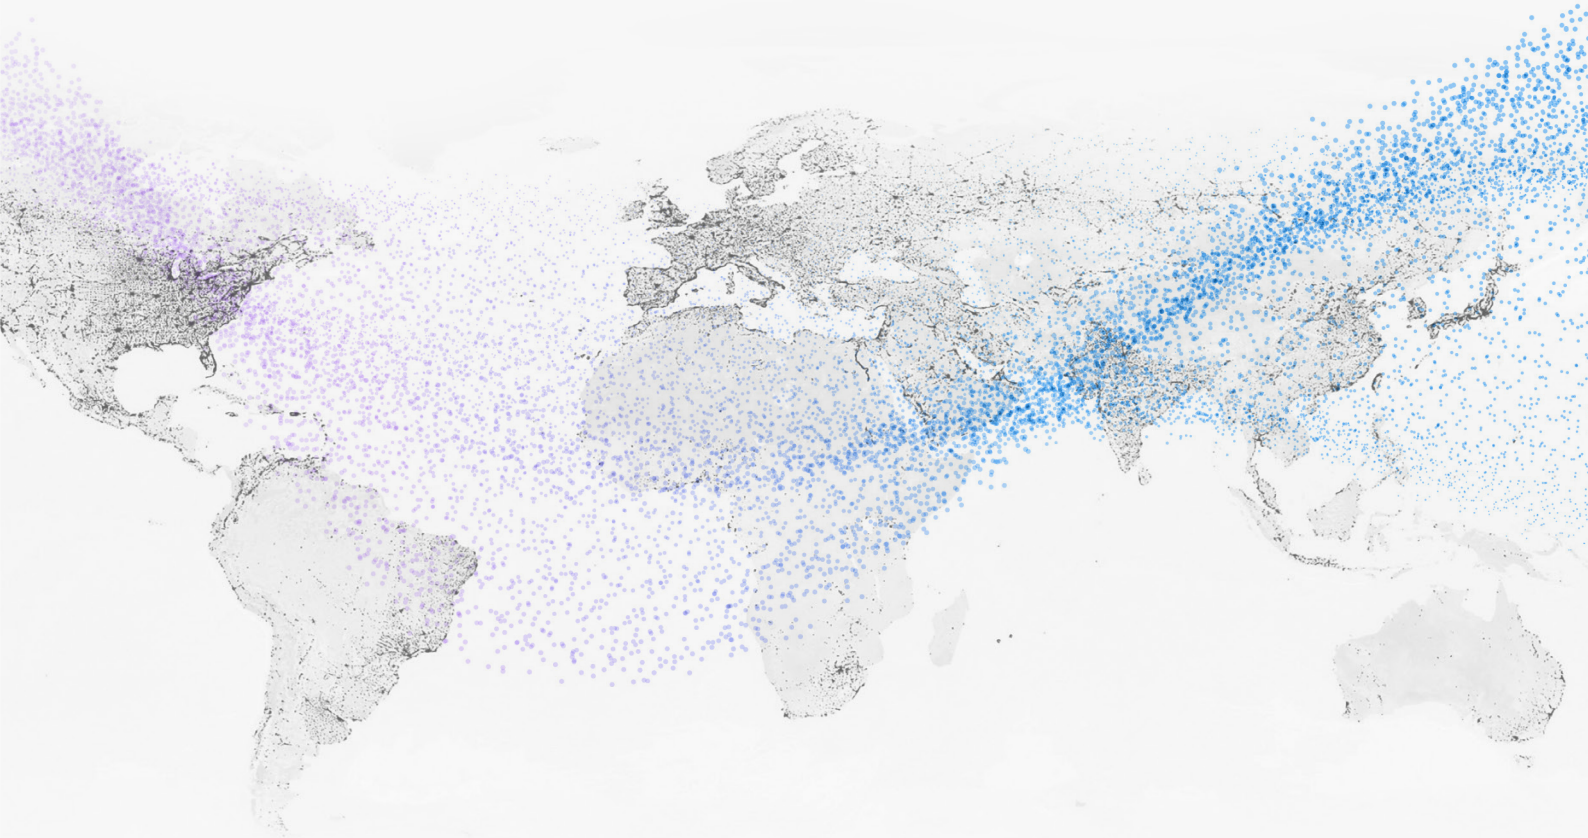

dfelectric.es

FABRICADO EN ESPAÑA · MADE IN SPAIN

According to the waste of electrical and electronic equipment directive, electrical material should not be part of the usual waste. This symbol alerts users that these products should be recycled according to local environmental waste disposal regulations.

The "electro technical expert" logo marked on the products included in this data sheet indicates that the installation of these products must be carried out by expert personnel with specialized knowledge.

To prevent electrical hazards, carry out the installation without voltage.

Safety notice
Please capture the following QR code and read our safety notice carefully before installing our products.

The data reflected in this technical record are subject to the correct installation of the product in accordance with manufacturer's instructions, relevant installation standards and professional practices, maintained and used in applications for which they were made.

The products described in this document have been designed, developed and tested in accordance with specific standard. They are considered components that are integrated as part of installation, machine or equipment. The correct general operation of the referred product is responsibility of the manufacturer of the installation, machine or equipment.

DF ELECTRIC cannot guarantee the characteristics of an installation, machine or equipment that has been designed by a third party. Once a product has been selected, the user must verify that it is appropriate for its application, through the verifications and/or tests that it deems appropriate.

DF ELECTRIC retains the right to change the dimensions, specifications, materials or design of its products at any time with or without notice.