

Lightning and Overvoltage Protection with Integrated Fuse

ProTec T1SF 2+0

Class I • Class II • Class III • Type 1 • Type 2 • Type 3



Location of Use: Main Distribution Boards
 Network Systems: TN-S
 Mode of Protection: L-PE, N-PE
 IEC/EN Category: Class I+II+III, Type 1+2+3
 Housing: Pluggable Design
 Compliance: IEC 61643-11: 2011
 EN 61643-11: 2012+A11:2018



Technical Data

ProTec T1SF-xxx-2+0(-R)

275

IEC Electrical

Nominal AC Voltage (50/60Hz)	U_o/U_n	240 V
Maximum Continuous Operating Voltage (AC)	(L-PE) / (N-PE) U_c	275 V / 305 V
Nominal Discharge Current (8/20 μ s)	(L-PE) / (N-PE) I_n	25 kA / 25 kA
Maximum Discharge Current (8/20 μ s)	(L-PE) / (N-PE) I_{max}	65 kA / 65 kA
Impulse Discharge Current (10/350 μ s)	(L-PE) / (N-PE) I_{imp}	25 kA / 25 kA
Specific Energy	(L-PE) / (N-PE) W/R	156.2 kJ/ Ω / 156.2 kJ/ Ω
Charge	(L-PE) / (N-PE) Q	12.5 As / 12.5 As
Open Circuit Voltage of Combination Wave Generator (1.2/50 μ s)	(L-PE) / (N-PE) U_{oc}	6 kV / 6 kV
Short Circuit Current of Combination Wave Generator (8/20 μ s)	(L-PE) / (N-PE) I_{cw}	3 kA / 3 kA
Voltage Protection Level	(L-PE) / (N-PE) U_p	1900 V / 1500 V
Response Time	(L-PE) / (N-PE) t_A	< 100 ns / < 100 ns
Overvoltage Category		III
Maximum Backup fuse, if required		Not Required
Short-Circuit Current Rating (AC)	I_{SCCR}	100 kA
Follow Current Interrupt Rating (AC)	(L-PE) / (N-PE) I_{fi}	100 kA/100 A
TOV Withstand 120min	(L-PE) U_T	442 V
TOV Withstand 200ms	(N-PE) U_T	1200 V
Number of Ports		1

Additional Electrical Parameters - Standard (Tests performed within Raycap testing laboratory only)

Residual Voltage at 5 kA (8/20 μ s)	(L-PE) / (N-PE) U_{res}	1200 V / 305 V
Minimum Backup fuse, if required		Not required


Mechanical & Environmental

Operating Temperature Range	T_a	-40 °F to +185 °F [-40 °C to +85 °C]
Permissible Operating Humidity	RH	5%...95%
Pollution Degree		2
Altitude		6562 ft [2000 m]
Terminal Screw Torque	M_{max}	40 lbf-in [4.5 Nm]
Conductor Cross Section (max)		2 AWG (Solid, Stranded) / 4 AWG (Flexible) 35 mm ² (Solid, Stranded) / 25 mm ² (Flexible)
Mounting		35 mm DIN Rail, EN 60715
Degree of Protection		IP 20 (built-in)
Housing Material		Thermoplastic: Extinguishing Degree UL 94 V-0
Thermal Protection		Yes
Operating State / Fault Indication		Green Flag / Not Green Flag
Remote Contacts (RC)		Optional
RC Switching Capacity		AC: 250V/1A, 125V/1A; DC: 48V/0.5A, 24V/0.5A, 12V/0.5A
RC Conductor Cross Section (max)		16 AWG (Solid) / 1.5 mm ² (Solid)
Overvoltage Category		III

Internal Configuration

Legend

- L Line Conductor Terminal
- N Neutral Conductor Terminal
- ⏏ PE Conductor Terminal
- RC Remote Contacts Terminal (Optional)
- TD Thermal Disconnect
- TI Thermal Indication
- F Integrated Surge Adapted Backup Fuse

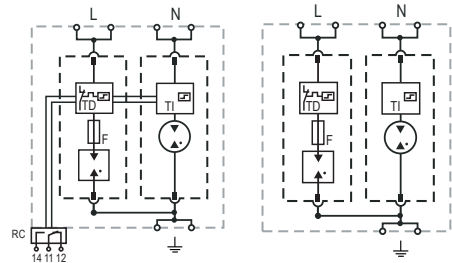


ProTec T1SF-xxx-2+0(-R)

Order Information	
Order Code	275
ProTec T1SF-xxx-2+0	59.C245
ProTec T1SF-xxx-2+0-R (with remote contacts)	59.C246
ProTec T1SF-xxx-P (plug L-N)	59.A502
ProTube T1SF-25-P (plug N-PE)	59.C674


Dimensions & Packaging

inches [mm]

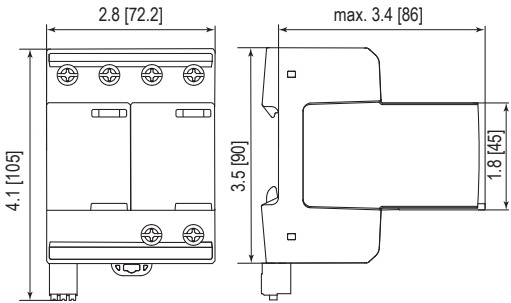

Complete Unit Dimensions & Packaging	
ProTec T1SF-xxx-2+0	275
Weight	pounds [grams] 1.171 [531]
ProTec T1SF-xxx-2+0-R	
Weight	pounds [grams] 1.186 [538]
DIN 43880 Dimension	4 TE / 2.8" [72.2 mm]
Packaging Dimensions (HxWxL)	4.3 x 4.5 x 13.8" [109 x 115 x 352 mm]
Standard Order Quantity	4 Units

Spare Plug



Single Unit	
ProTec T1SF-xxx-P	275
Weight	pounds [grams] .427 [194]
ProTube T1SF-xx-P	25
Weight	pounds [grams] .209 [95]
DIN 43880 Dimension	2 TE / 1.42" [36 mm]
Packaging Dimensions (HxWxL)	4.3 x 4.5 x 13.8" [109 x 115 x 352 mm]
Standard Order Quantity	14 Units